



A BRIGHTER FUTURE

UK **LED** lighting

## Micro LED Bar 18.75mm Pitch IP67

LDT/IES files

IP67

High CRI option


Dimmable

50,000 hours



Part No.	E-30-3C2-24-150-6-SSC5
LED Pitch	18.75mm
CCT	2200k / 2400k / 2700k / 2800k / 3000k / 4000k / 5700k
Lumen CRI 85	640 / 670 / 810 / 870 / 950 / 1120 / 1120
CCT	2600k / 2800k / 3000k
Lumen CRI 92	600 / 650 / 720
Beam Angle	120°
Power Consumption (per metre)	11 Watts
Volt/DC	24
Chip Used	5050 Tri chip Seoul Semiconductor / Samsung
PCB Length (mm)	150 / 75
Straight end cap combined length (mm)	11 + 11 = 22
Maximum serial connection (mm)	4500
Tc point °C	55
Lumen / Watt	57-100

Polar Diagram

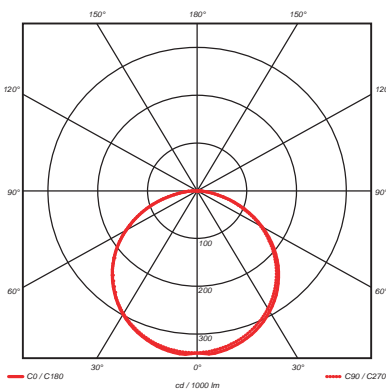

Head Office  
 UK LED Lighting  
 Derby Road  
 Kingsbridge  
 Devon  
 TQ7 1JL  
 Tel: +44 (0)1548 853878  
 Fax: +44 (0)1548 856820  
 Email: enquiries@ukledlighting.com

UK LED Lighting  
 Queens House  
 Paragon Street  
 Hull  
 East Riding of Yorkshire  
 HU1 3NQ





Tel: +44 (0)1482 506333  
 Email: phil.irvin@ukledlighting.com

UK LED Lighting  
 8 Grange Close  
 Buckingham  
 Buckinghamshire  
 MK18 1JJ


Tel: +44 (0)1280 817284  
 Email: barry.mcgowan@ukledlighting.com

# Dimensions


Straight end cap with fixing lug

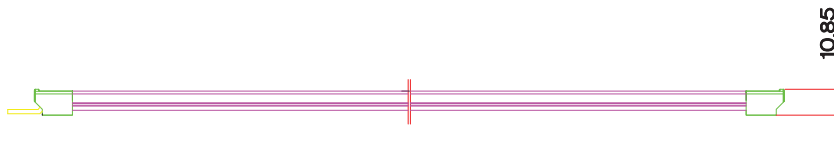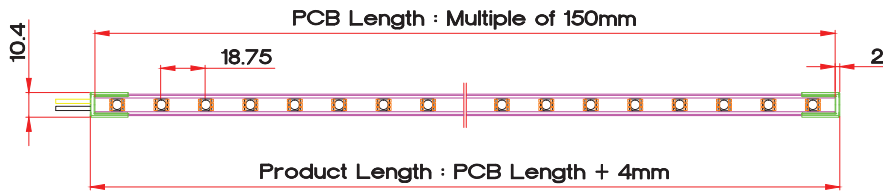


nylon fixing clip

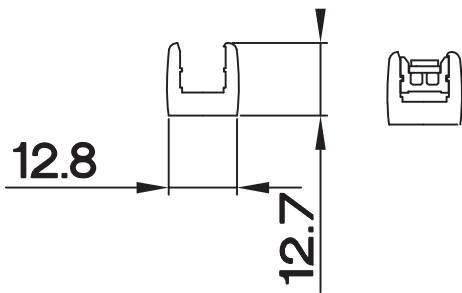


stainless steel fixing clip

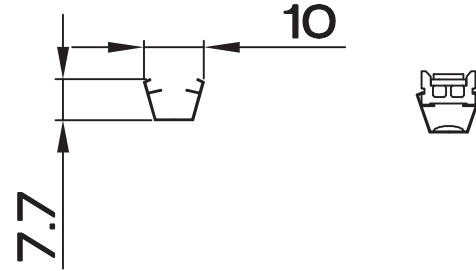

adjustable stainless fixing clip

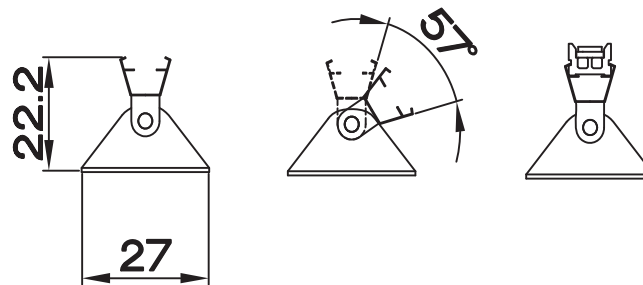

## MacAdam Ellipse - 3Step

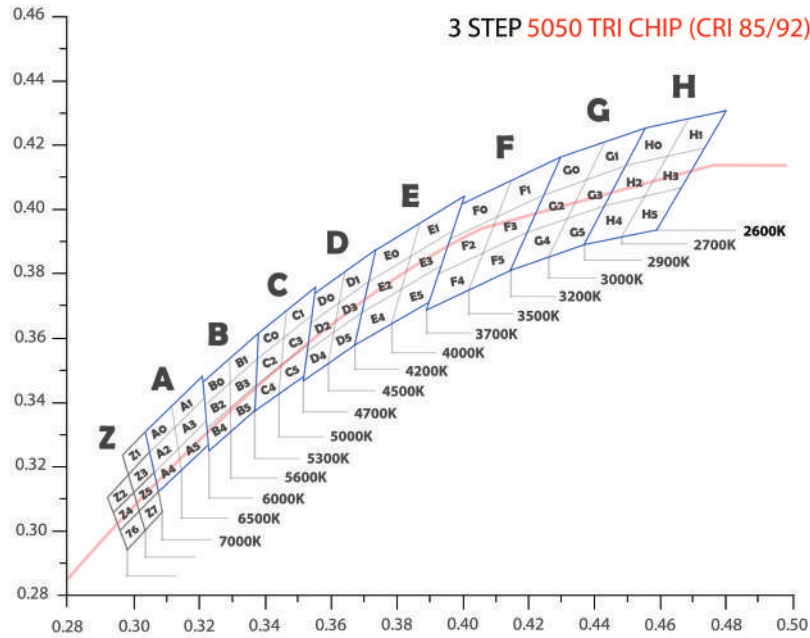

## Part numbering key

