



A BRIGHTER FUTURE

UK LED lighting

Micro LED Bar 8.3mm Pitch IP67

LDT /IES files

IP67


High CRI option

Dimmable

50,000 hours



Part No.	E-28H-3C1-24-75-11-SSC5
LED Pitch	8.3mm
CCT	2200k / 2400k / 2700k / 2800k / 3000k / 4000k / 5700k
Lumen CRI 85	1069 / 1119 / 1353 / 1453 / 1586 / 1870 / 1870
CCT	2600k / 2800k / 3000k
Lumen CRI 92	1119 / 1219 / 1353
Beam Angle	120°
Power Consumption (per metre)	16.7 Watts
Volt/DC	24
Chip Used	5050 Tri chip Seoul Semiconductor / Samsung
PCB Length (mm)	75
Straight end cap combined length (mm)	11 + 11 = 22
Maximum serial connection (mm)	2400
Tc point °C	55
Lumen / Watt	64-112

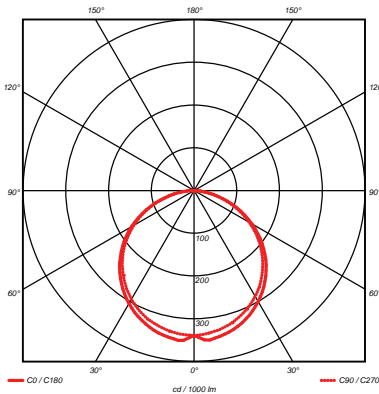

Head Office
UK LED Lighting
Derby Road
Kingsbridge
Devon
TQ7 1JL
Tel: +44 (0)1548 853878
Fax: +44 (0)1548 856820
Email: enquiries@ukledlighting.com

UK LED Lighting
Queens House
Paragon Street
Hull
East Riding of Yorkshire
HU1 3NQ


Tel: +44 (0)1482 506333
Email: phil.irvin@ukledlighting.com

UK LED Lighting
8 Grange Close
Buckingham
Buckinghamshire
MK18 1JJ


Tel: +44 (0)1280 817284
Email: barry.mcgowan@ukledlighting.com

Dimensions


Straight end cap with fixing lug

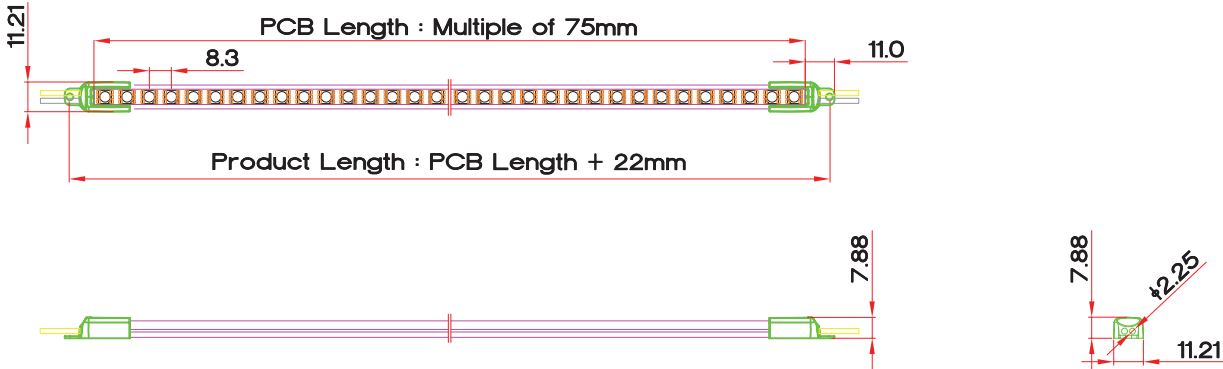


nylon fixing clip

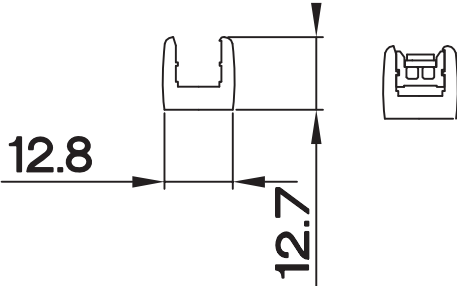


stainless steel fixing clip

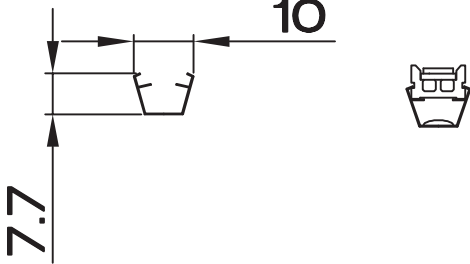

adjustable stainless fixing clip

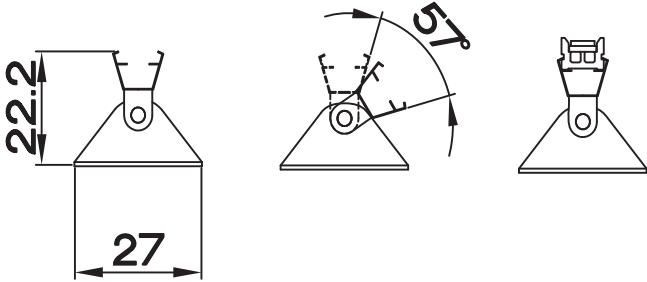

MacAdam Ellipse - 3 step

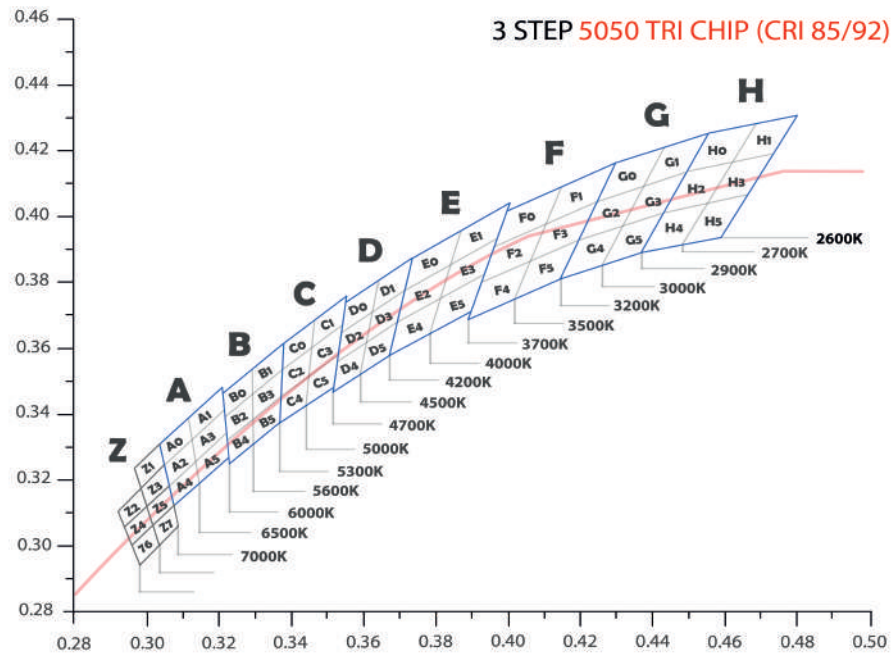

Part numbering key

