



A BRIGHTER FUTURE

UK **LED** lighting

Accent LED Bar 15mm 40°

Linear Lens

LDT /IES files

IP20-65

High CRI option



Dimmable



Part No.	E-28H-2EC1-24-90-11D-4SC4
LED Pitch	15mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k/5700k / 6300k
Lumen CRI 85	813 / 983 / 1056 / 1153 / 1258 / 1360 / 1360
CCT	2600k / 2800k / 3000k / 4000k
Lumen CRI 92	728 / 792 / 869 / 924
Beam Angle	40°
Power Consumption (per metre)	19.7 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	90 / 45
End cap combined length (mm)	13.5 + 13.5 = 27
Maximum serial connection (mm)	2500
Tc point °C	55
Lumen/Watt	63-106



Dimensions

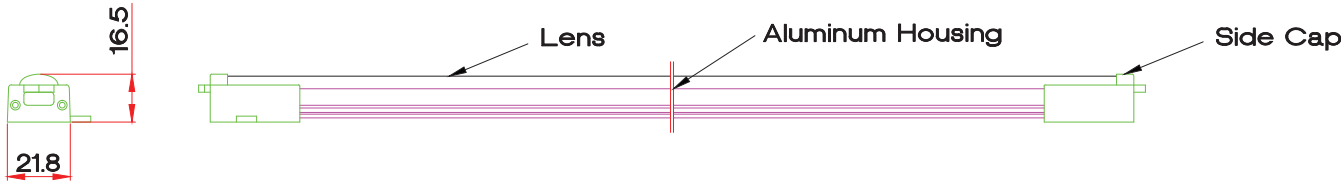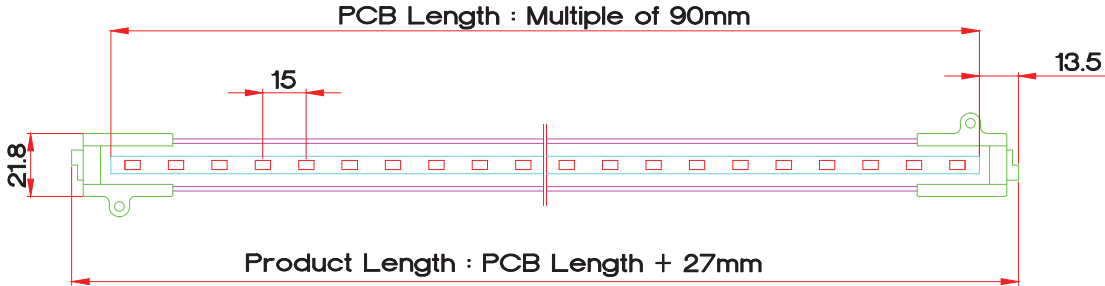

Stainless Steel Fixed Bracket



Stainless Steel Adjustable Bracket

