



A BRIGHTER FUTURE

# UK **LED** lighting

## Accent LED Bar 25mm 40°

Linear Lens

LDT /IES files

IP20-65

High CRI option



Dimmable

CE

Part No.	E-28H-2EC3-24-150-8D-4SC4
LED Pitch	25mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k / 6300k
Lumen CRI 85	583 / 704 / 757 / 826 / 901 / 974 / 974
CCT	2600k / 2800k / 3000k / 4000k
Lumen CRI 92	522 / 568 / 622 / 662
Beam Angle	40°
Power Consumption (per metre)	14.1 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	150 / 75
End cap combined length (mm)	13.5 + 13.5 = 27
Maximum serial connection (mm)	4000
Tc point °C	45
Lumen/Watt	63-106




# Dimensions

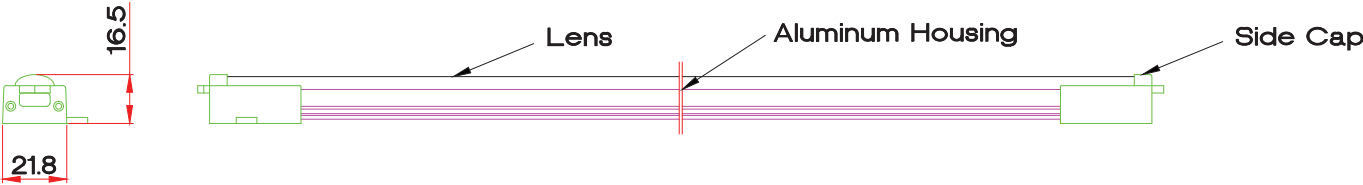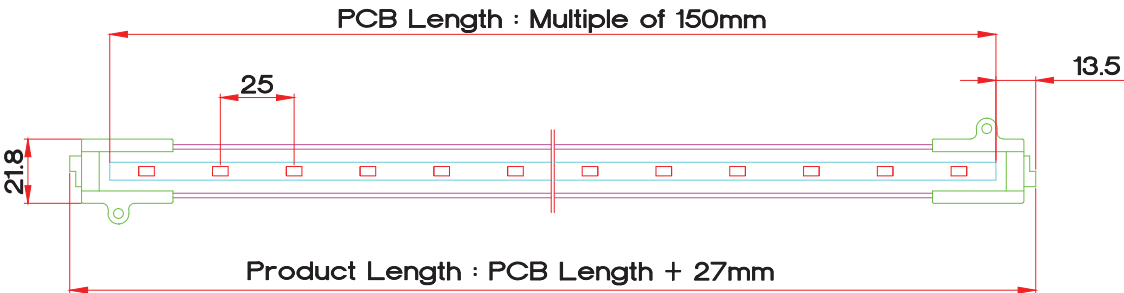



Stainless Steel Fixed Bracket



Stainless Steel Adjustable Bracket

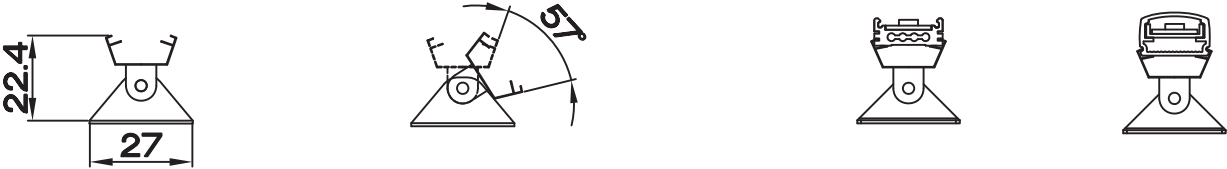

# Binning 2 or 3 step MacAdam Ellipse

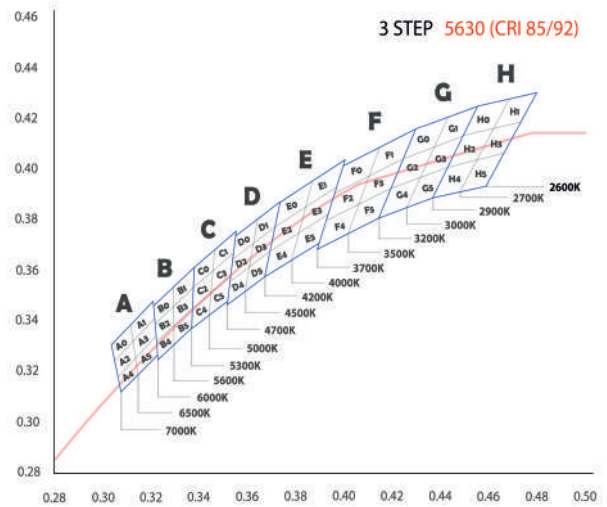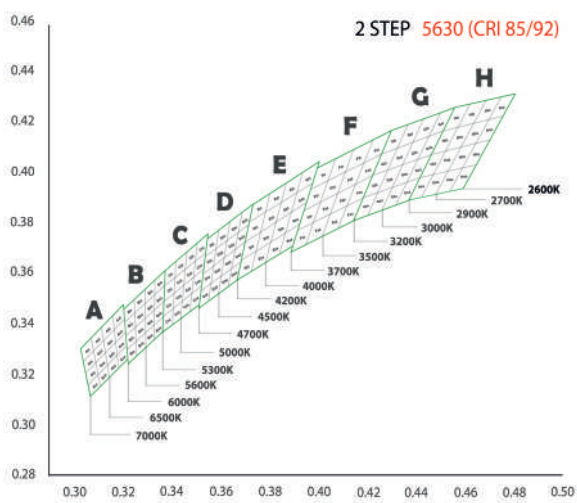

3 Step MacAdam Ellipse by default

## Part numbering key

