



A BRIGHTER FUTURE

UK **LED** *lighting*

Accent LED Bar 7.15mm 40°

Linear Lens

LDT /IES files

IP20-65

High CRI option



Dimmable

CE

Part No.	E-24-2EC0-24-100-10D-4SC2
LED Pitch	7.15mm
CCT	2400k / 2600k / 2800k / 3000k / 4000K / 5700k / 6300k
Lumen CRI 85	1060 / 1281 / 1376 / 1503 / 1633 / 1776 / 1776
CCT	2600k / 2800k / 3000k / 4000K
Lumen CRI 92	1009 / 1091 / 1302 / 1403
Beam Angle	40°
Power Consumption (per metre)	23 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	100 / 50
End cap combined length (mm)	13.5 + 13.5 = 27
Maximum serial connection (mm)	2000
Tc point °C	60
Lumen/Watt	63-106




Dimensions

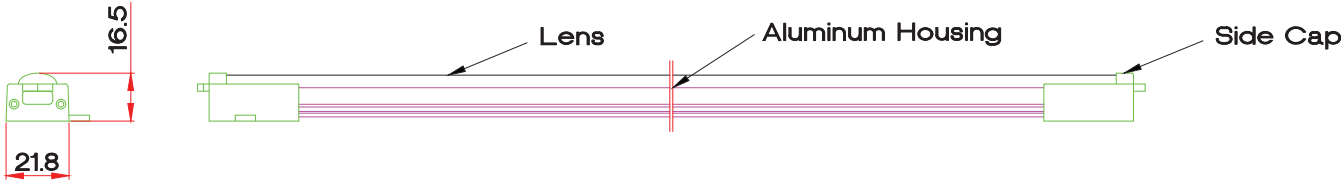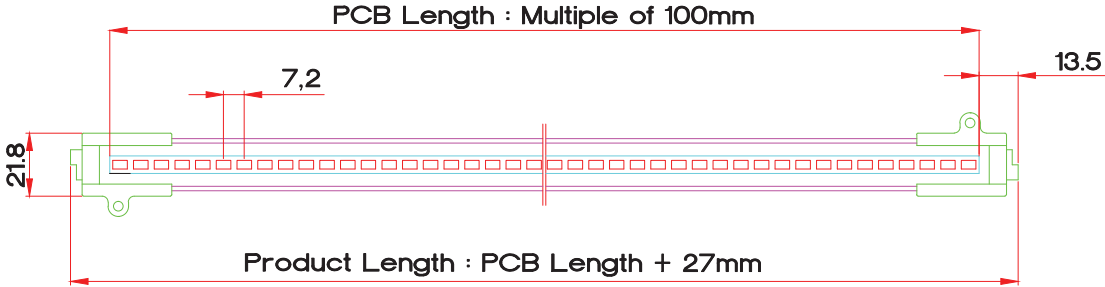



Stainless Steel Fixed Bracket



Stainless Steel Adjustable Bracket

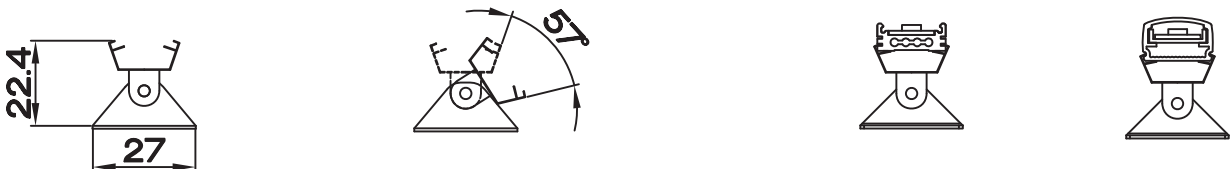

Binning 2 or 3 step MacAdam Ellipse

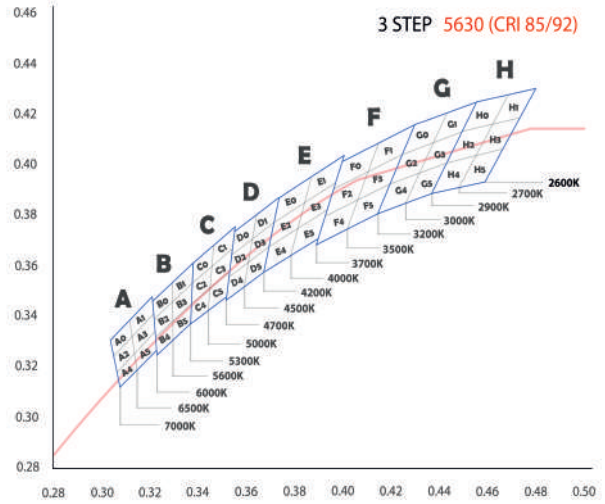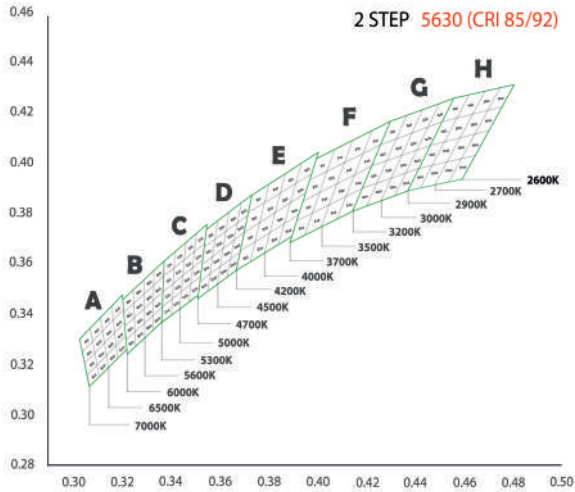

3 Step MacAdam Ellipse by default

Part numbering key

