



A BRIGHTER FUTURE

# UK **LED** *lighting*

## Accent LED Bar 15mm 60°

Linear Lens

LDT /IES files

IP20-65

High CRI option



Dimmable

CE

Part No.	E-28H-2EC1-24-90-11D-6SC4
LED Pitch	15mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k / 6300k
Lumen CRI 85	976 / 1180 / 1267 / 1384 / 1494 / 1631 / 1631
CCT	2600k / 2800k / 3000k / 4000k
Lumen CRI 92	874 / 951 / 1043 / 1121
Beam Angle	60°
Power Consumption (per metre)	19.7 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	90 / 45
End cap combined length (mm)	13.5 + 13.5 = 27
Maximum serial connection (mm)	2500
Tc point °C	60
Lumen/Watt	63-106




# Dimensions

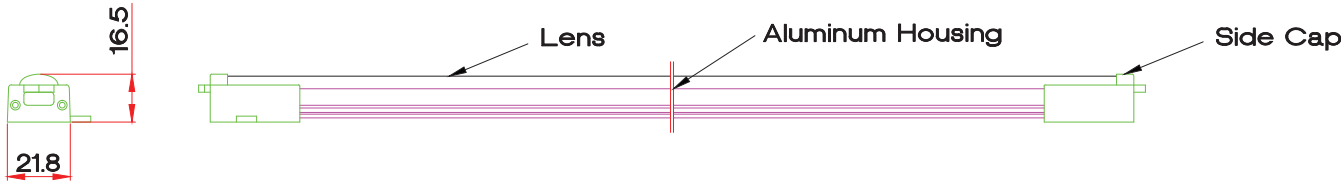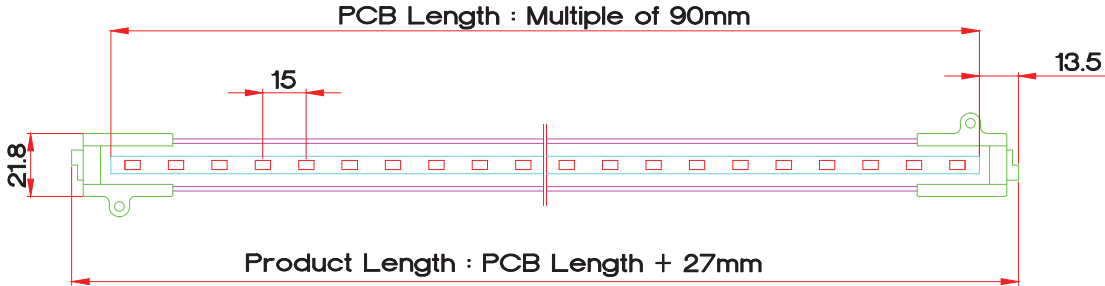



Stainless Steel Fixed Bracket



Stainless Steel Adjustable Bracket

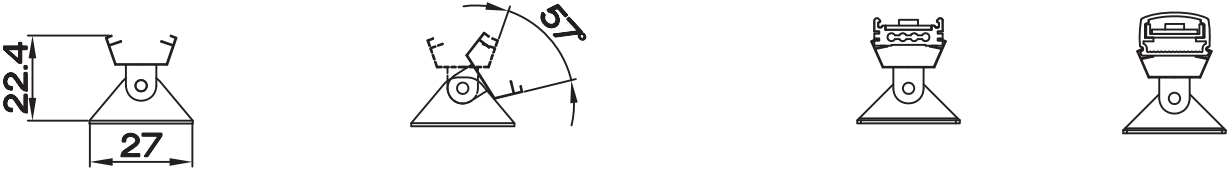

# Binning 2 or 3 step MacAdam Ellipse

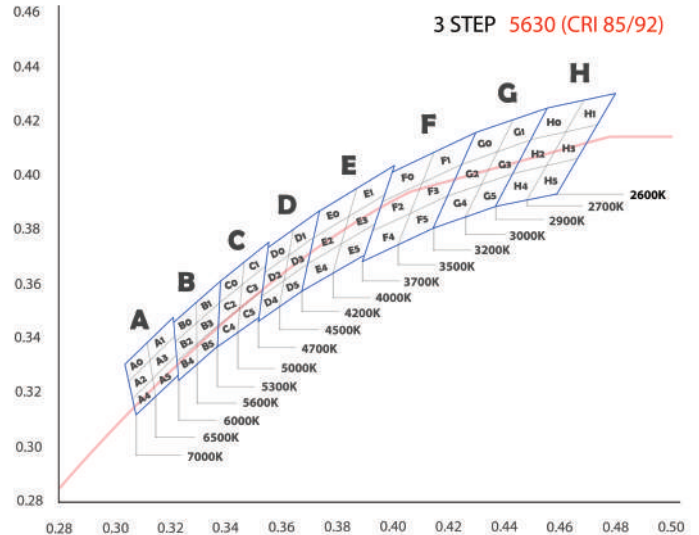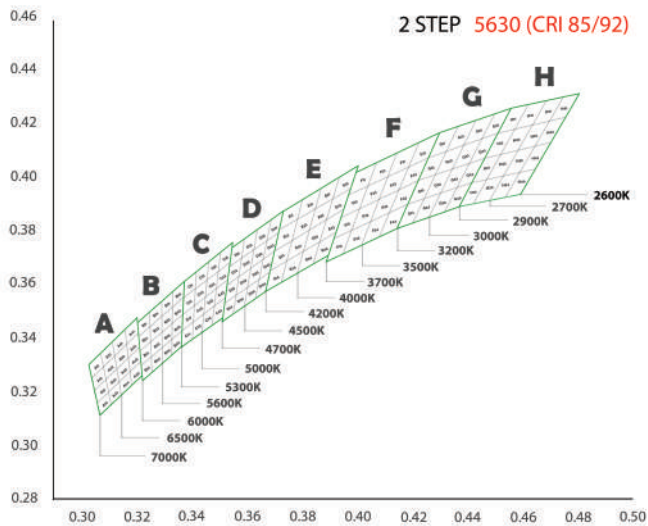

3 Step MacAdam Ellipse by default

## Part numbering key

