



A BRIGHTER FUTURE

UK LED lighting

Accent LED Bar 18.75mm 60°

Linear Lens

LDT /IES files

IP20-65

High CRI option

Dimmable



Part No.	E-28H-2EC2-24-112-11D-6SC4
LED Pitch	18.75mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k / 6300k
Lumen CRI 85	887 / 1072 / 1151 / 1257 / 1357 / 1482 / 1482
CCT	2600k / 2800k / 3000k / 4000k
Lumen CRI 92	794 / 864 / 947 / 1018
Beam Angle	60°
Power Consumption (per metre)	17.9 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	112.5 / 56
End cap combined length (mm)	13.5 + 13.5 = 27
Maximum serial connection (mm)	2800
Tc point °C	50
	63-106



Head Office
UK LED Lighting
Derby Road
Kingsbridge
Devon
TQ7 1JL

Tel: +44 (0)1548 853878
Fax: +44 (0)1548 856820
Email: enquiries@ukledlighting.com



UK LED Lighting
Queens House
Paragon Street
Hull
East Riding of Yorkshire
HU1 3NQ

Tel: +44 (0)1482 506333
Email: phil.irvin@ukledlighting.com

UK LED Lighting
8 Grange Close
Buckingham
Buckinghamshire
MK18 1JJ

Tel: +44 (0)1280 817284
Email: barry.mcgowan@ukledlighting.com


Dimensions

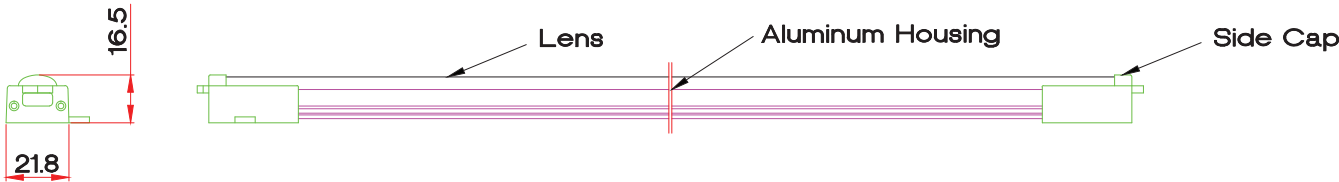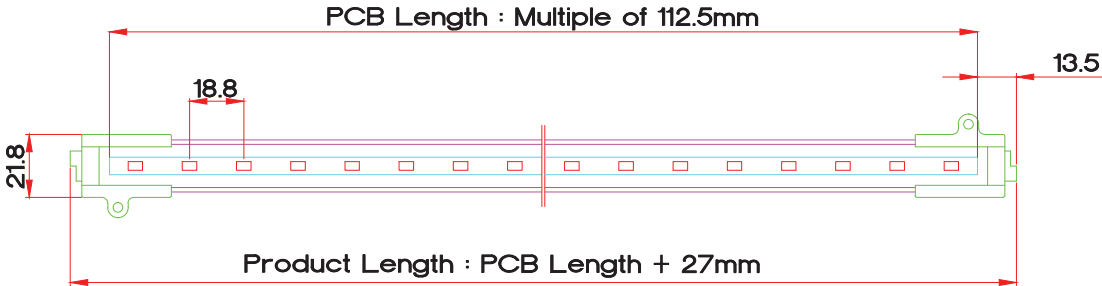



Stainless Steel Fixed Bracket



Stainless Steel Adjustable Bracket

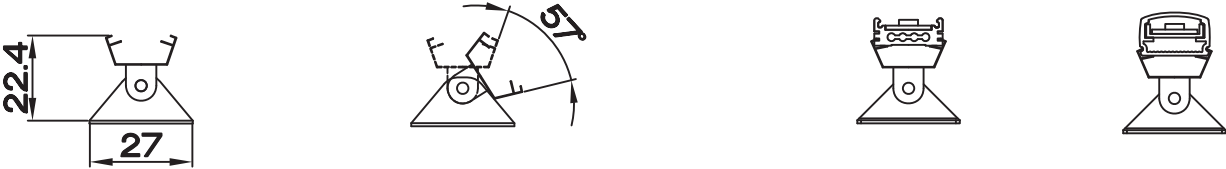

Binning 2 or 3 step MacAdam Ellipse

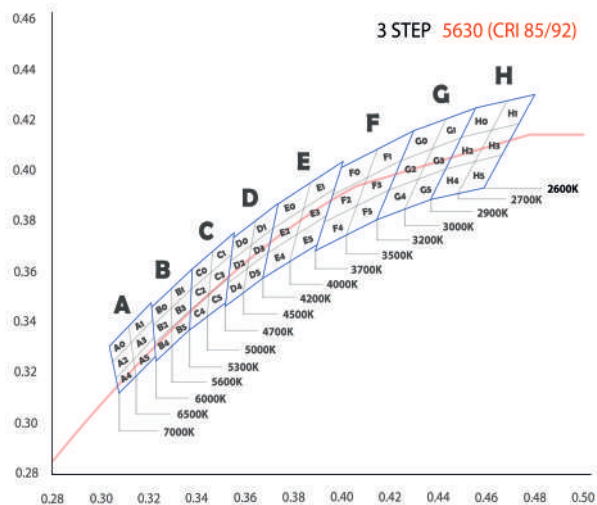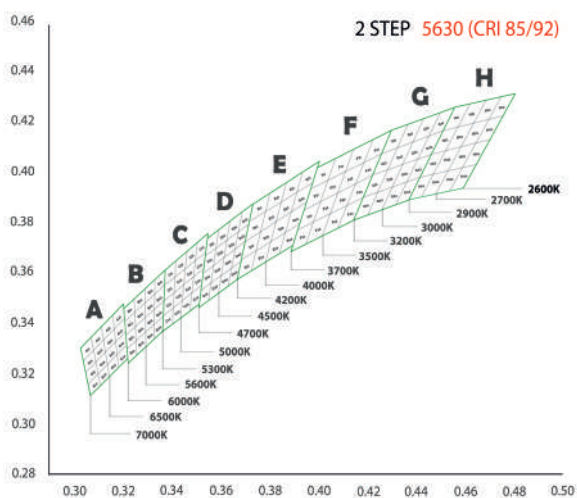

3 Step MacAdam Ellipse by default

Part numbering key

