



A BRIGHTER FUTURE

UK LED lighting

Micro X LED Bar 40mm IP67

LDT /IES files



IP67

High CRI option

Dimmable




Part No.	E-28-2EC4-24-240-4-SSG5
LED Pitch	40mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k
Lumen CRI 85	478 / 578 / 621 / 678 / 799 / 799
CCT	2600k / 2800k / 3000k
Lumen CRI 92	395 / 428 / 511
Beam Angle	120°
Power Consumption (per metre)	7.5 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	240 / 120
Straight end cap combined length (mm)	2 + 2 = 4
Maximum serial connection (mm)	4800
Tc point °C	35
Lumen/Watt	63-106

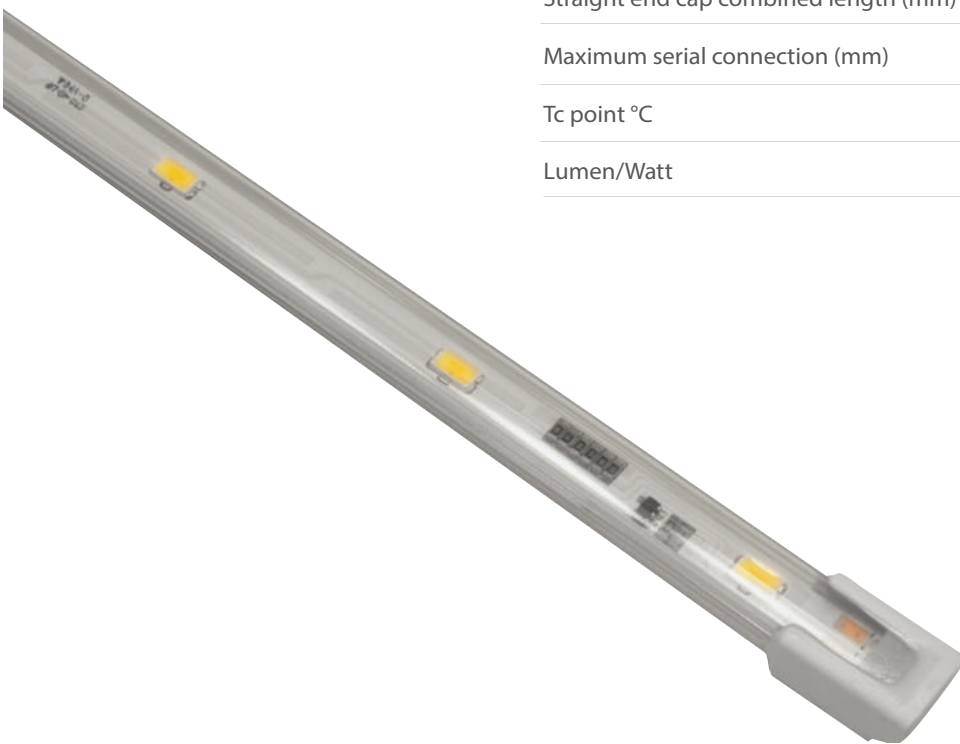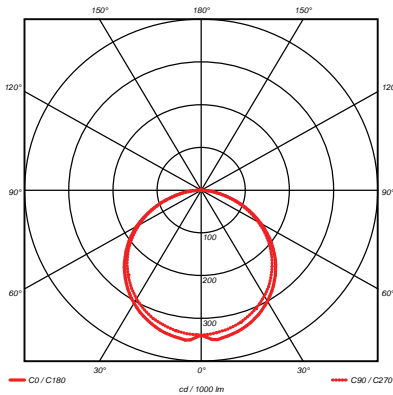


Dimensions


Straight end cap

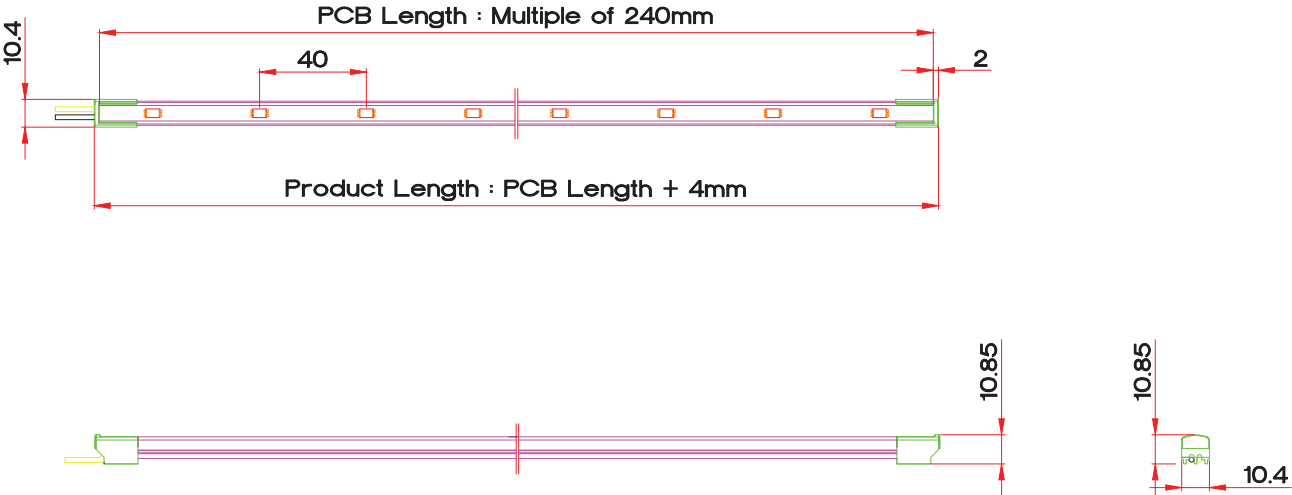


nylon fixing clip

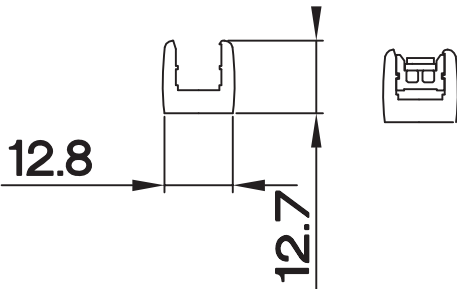



stainless steel fixing clip

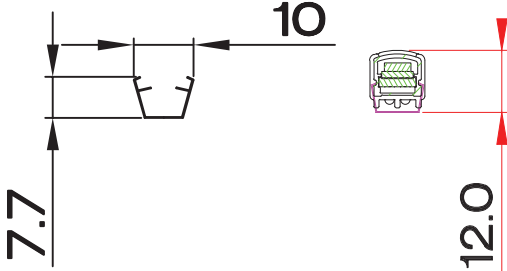

adjustable stainless fixing clip

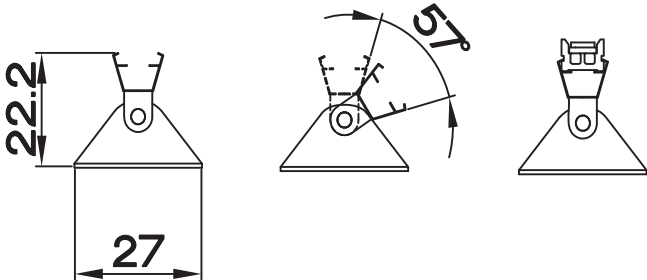

Binning 2 or 3 step MacAdam Ellipse

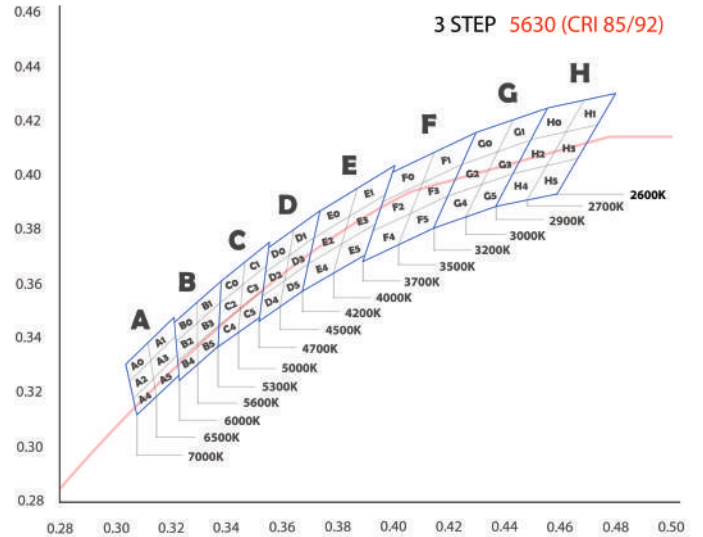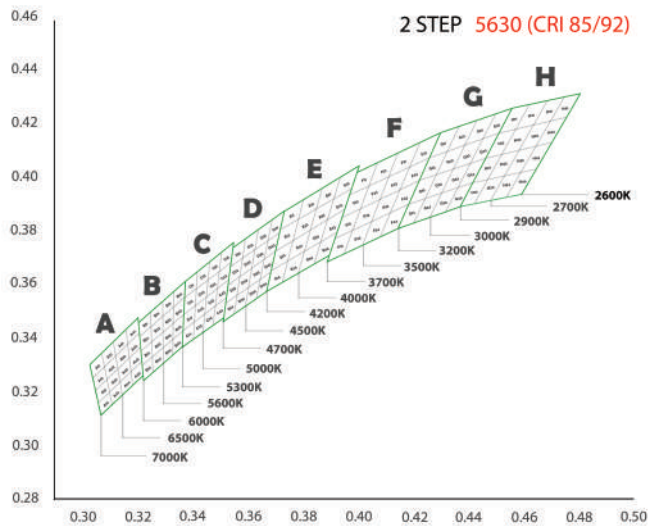

3 Step MacAdam Ellipse by default

Part numbering key

