




A BRIGHTER FUTURE

UK LED lighting




Slimline 15 LED

Dynamic White available IP20 -IP67 High CRI option Dimmable CE



Part No.	E-28-2EC1-24-90-11-SL15
LED Pitch	15mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k
Lumen Clear Cover	1121 / 1355 / 1455 / 1589 / 1725 / 1873
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k
Lumen Opal Diffuser	841 / 1016 / 1091 / 1191 / 1293 / 1405
Beam Angle	120°
Power Consumption (per metre)	17.6 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	90/45
Flat end cap combined length (mm)	3+3=6
Maximum serial connection (mm)	3000
Tc point °C	60
Lumen/Watt	63-106

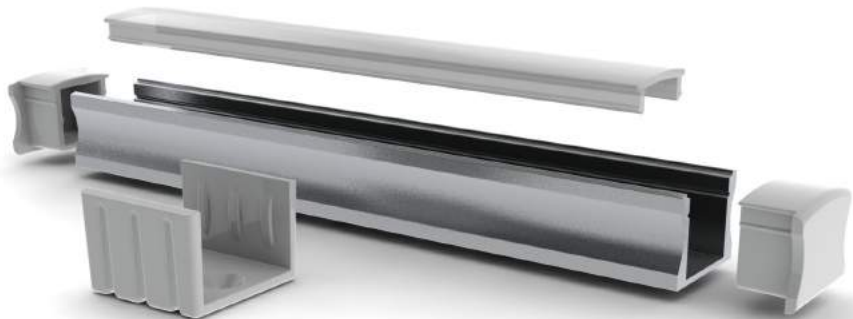

Dimensions

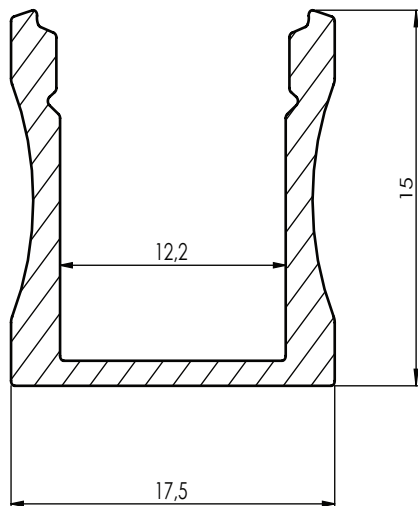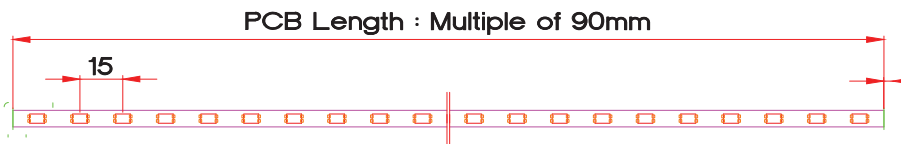

Binning 2 or 3 step MacAdam Ellipse

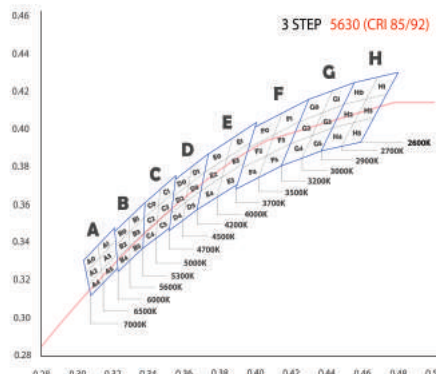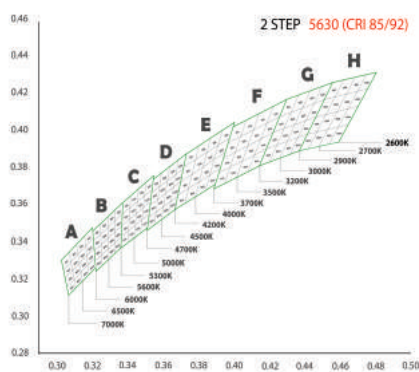

3 Step MacAdam Ellipse by default

Part numbering key

CCT : 2200K -10,000K

Input Volt : DC24V

Q'ty of PCB unit half PCB

Slimline 15 LED Profile

E-28H-2EC1-24-90-11D-Slim15

H : CRI 90
(standard CRI 80+)

2EC : 5630 Chip

C1: 15mm pitch

PCB 90mm

