



A BRIGHTER FUTURE

UK LED lighting

Micro X LED Bar 15mm IP67

LDT /IES files


IP67

High CRI option

Dimmable




Part No.	E-28-2EC1-24-90-11-SSC5
LED Pitch	15mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k
Lumen CRI 85	953 / 1152 / 1237 / 1351 / 1592 / 1592
CCT	2600k / 2800k / 3000k
Lumen CRI 92	791 / 853 / 1018
Beam Angle	120°
Power Consumption (per metre)	15 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	90/45
Straight end cap combined length (mm)	2+2=4
Maximum serial connection (mm)	2000
Tc point °C	50
Lumen/Watt	63-106

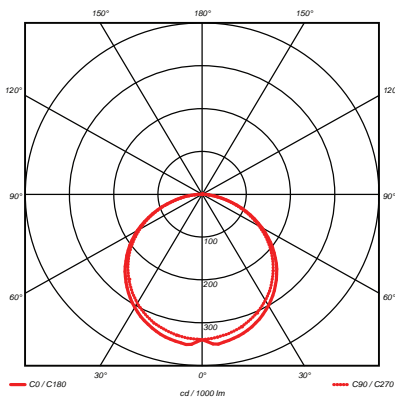


Dimensions


Straight end cap

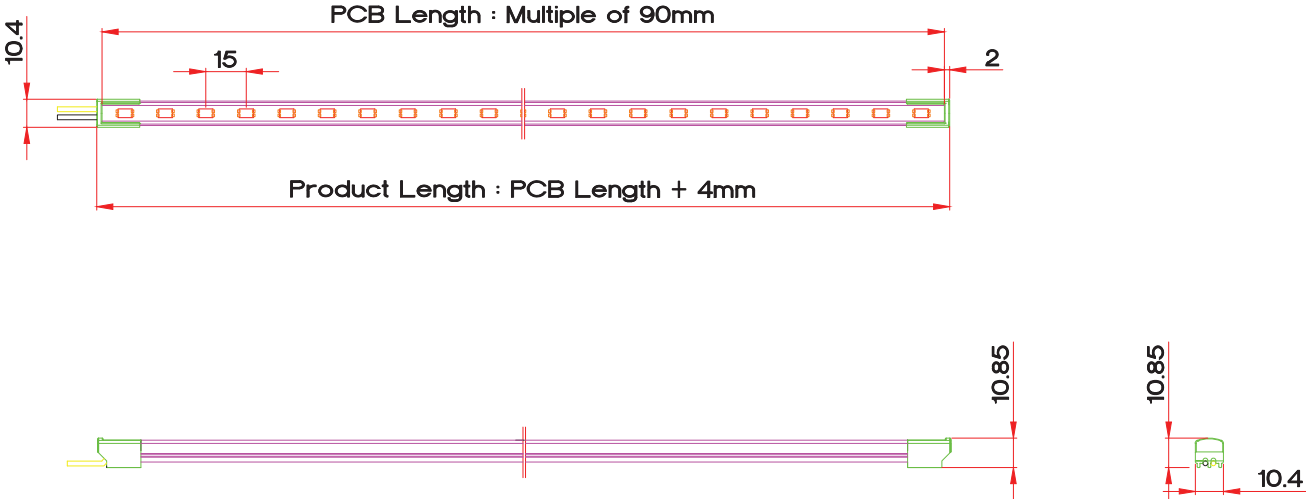

nylon fixing clip

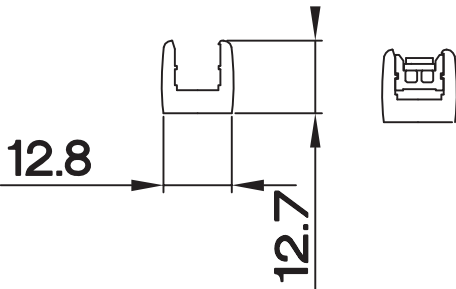

stainless steel fixing clip

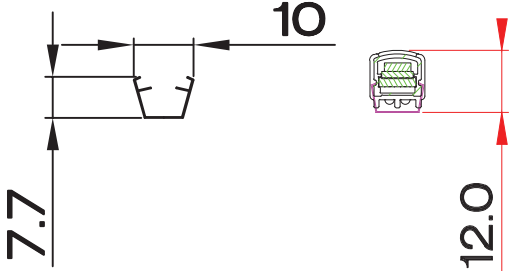

adjustable stainless fixing clip

