



A BRIGHTER FUTURE

UK **LED** lighting


## Micro X LED Bar 18.75mm IP67

LDT /IES files

IP67

High CRI option

Dimmable

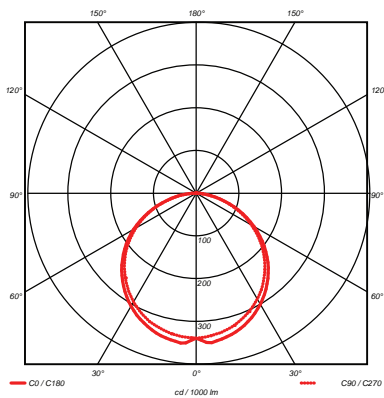


Part No.	E-28-2EC2-24-112.5-8-SSC5
LED Pitch	18.75mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k
Lumen CRI 85	866 / 1047 / 1124 / 1227 / 1447 / 1447
CCT	2600k / 2800k / 3000k
Lumen CRI 92	717 / 775 / 925
Beam Angle	120°
Power Consumption (per metre)	13.6 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	112.5/56
Straight end cap combined length (mm)	2+2=4
Maximum serial connection (mm)	2200
Tc point °C	N/A
Lumen/Watt	64-106




# Dimensions


Straight end cap

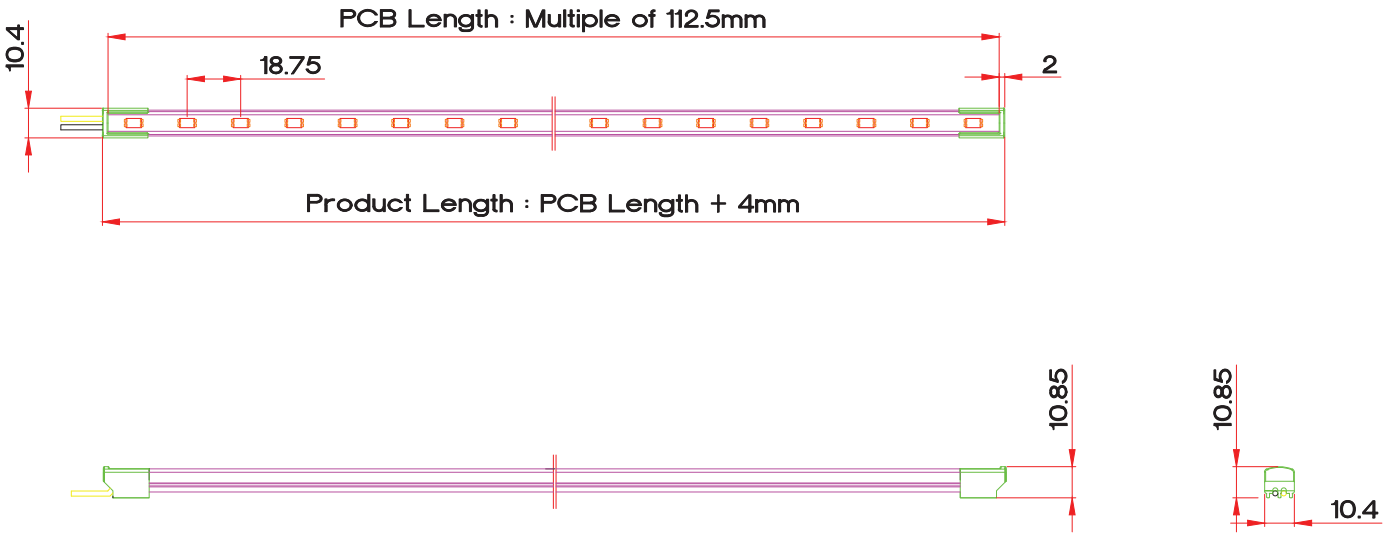


nylon fixing clip

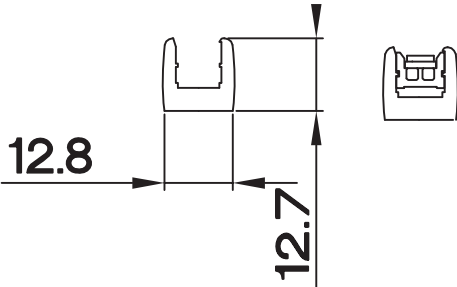



stainless steel fixing clip

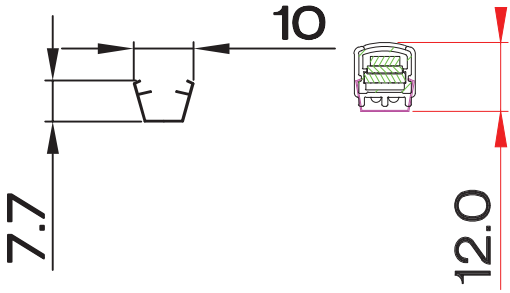

adjustable stainless fixing clip

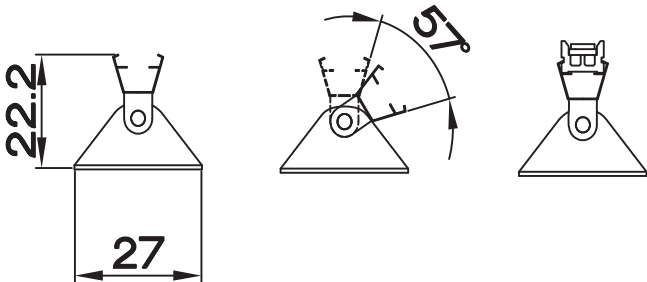

# Binning 2 or 3 step MacAdam Ellipse

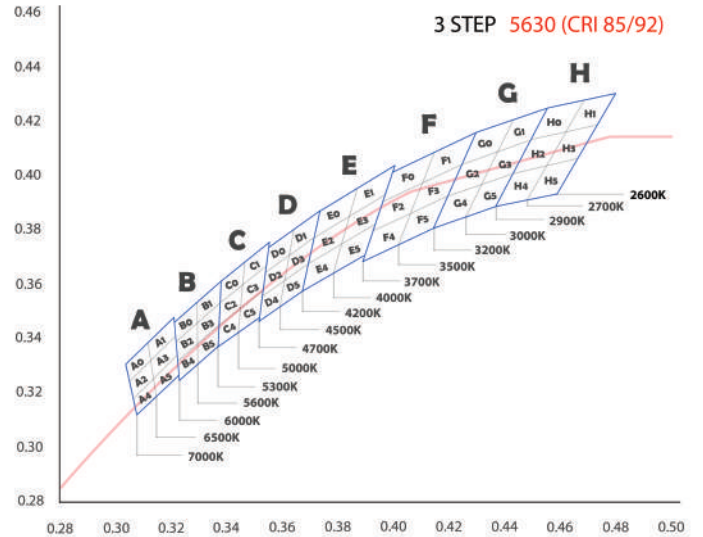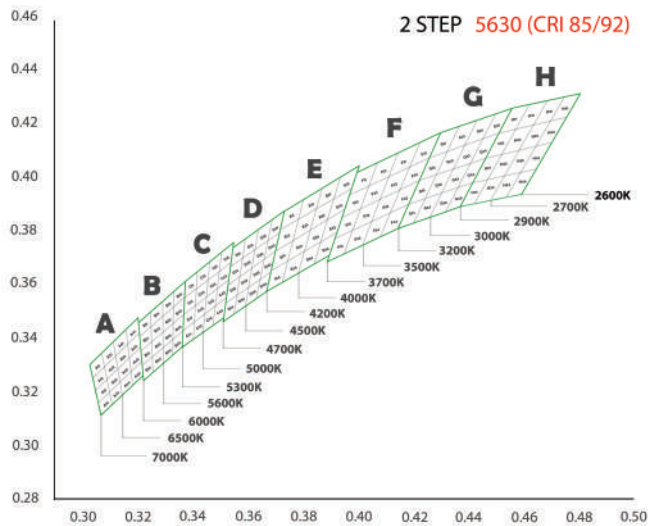

3 Step MacAdam Ellipse by default

## Part numbering key

