



A BRIGHTER FUTURE

UK **LED** *lighting*

Reflector LED Bar 25mm

LDT /IES files

IP20

High CRI option


Dimmable

CE

Part No.	E-27-1HC3-24-150-0-RSC2
LED Pitch	25mm
CCT	2700k / 3000k / 4000k / 5700k
Lumen CRI 85	1178 / 1263 / 1330 / 1397
Beam Angle	60°
Power Consumption (per metre)	16.3 Watts
Volt/DC	24
Chip Used	5050 1 Watt
PCB Length (mm)	150
End cap combined length (mm)	13.5 + 13.5 = 27
Maximum serial connection (mm)	3450
Tc point °C	55
Lumen/Watt	63-106




Dimensions

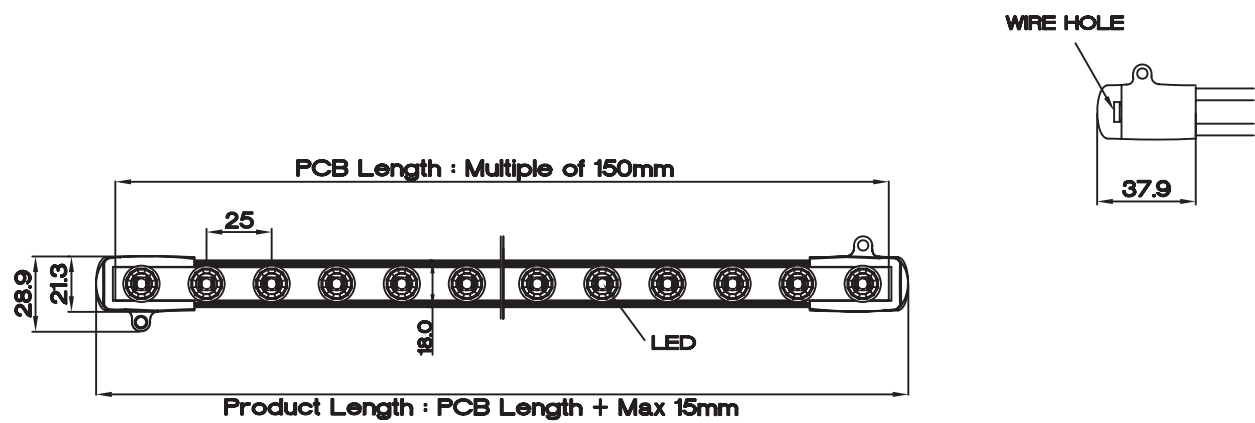



Stainless Steel Fixed Bracket



Stainless Steel Adjustable Bracket

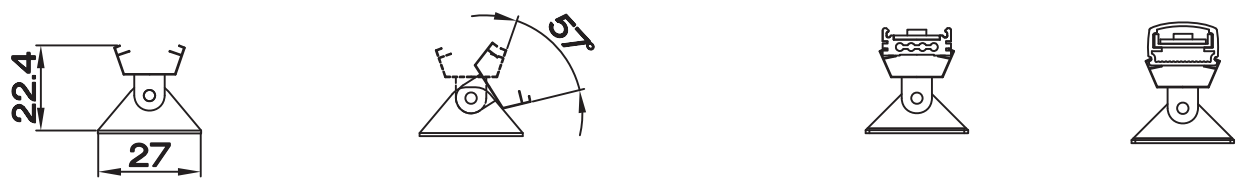

Binning 2 or 4 step MacAdam Ellipse

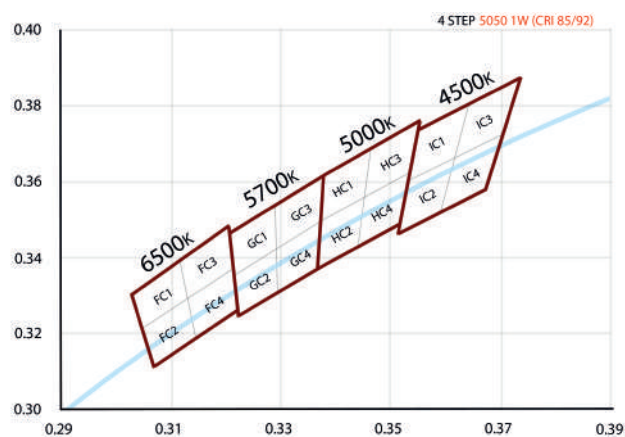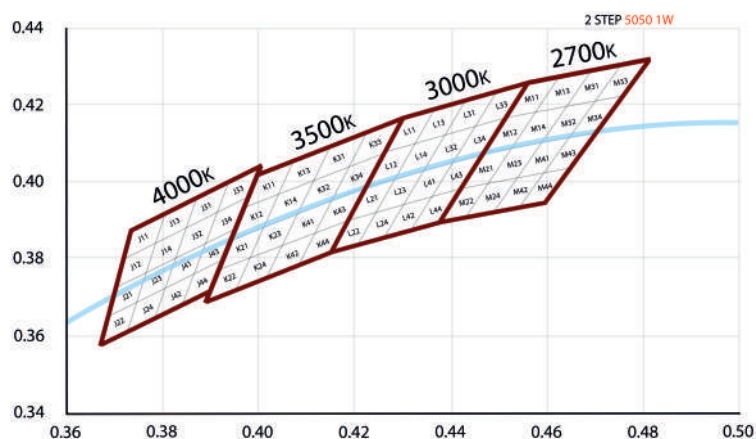

Part numbering key

CCT : 2700K H : CRI 85 Input Volt : DC24V Q'ty of PCB S : Single lead
B : Both end lead

E-27H-1HC3-24-150-0-RSC2

1H : 5050 1W C3 : 25mm pitch PCB 150mm R : Reflector C2 : IP20

www.ukledlighting.com