
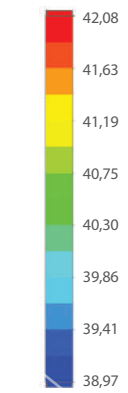
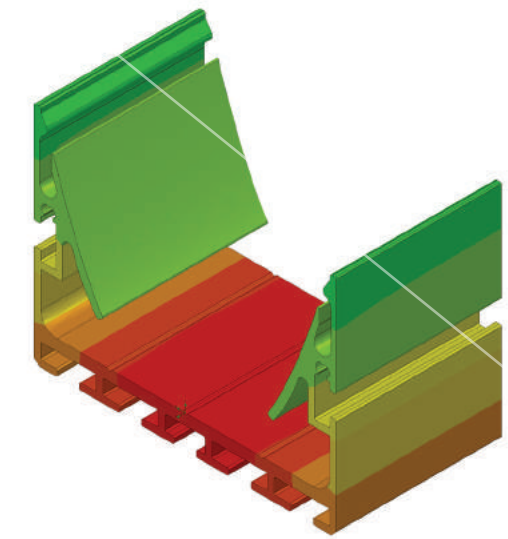



PL55 TRIMLESS & SURFACE LED PROFILE

PL55; 55 x 41 mm

Is a very attractive high performance trimless profile, which comes equipped with a 50mm wide diffuser that has opal and prismatic low glare options, in order to maximise light distribution and fixture efficiency from a power loading of up to 36W/M, to give a stabilised low working temperature of 55C@Ta=25C.
 PL 55 trimless is a clean contemporary trimless design that is suitable for gypsum ceiling installations of 12.5mm and 24mm.

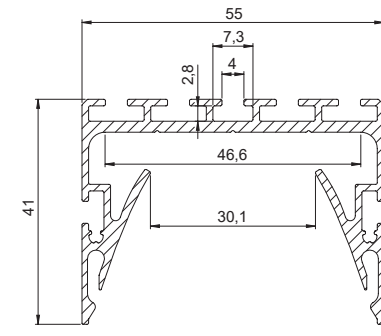


Temperature (Solid) [°C]
 Temperature ambient: 25°C
 Total power: 36 W/m (72 LEDs)

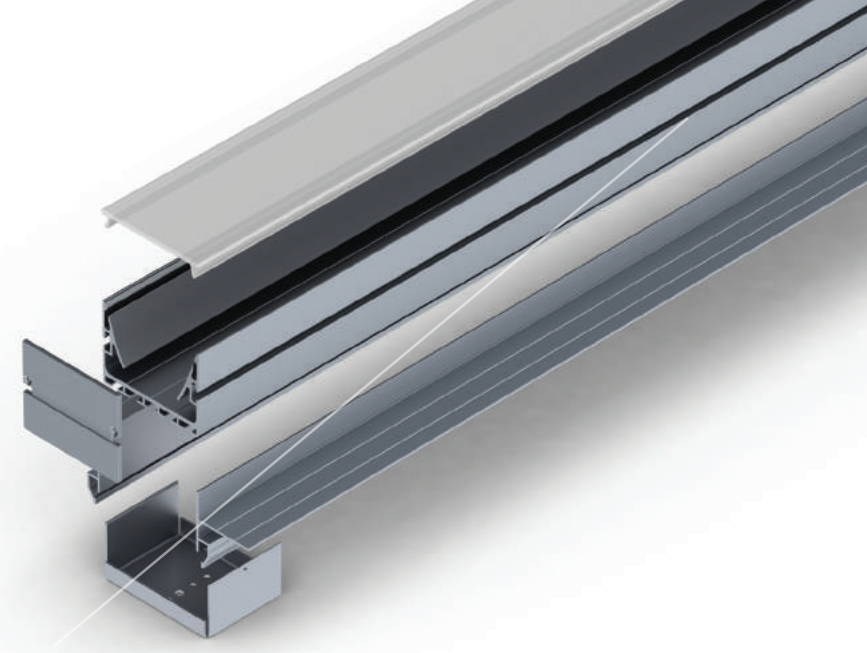

EC-PL55 End Caps




MC-PL55-MAG Mounting Brackets

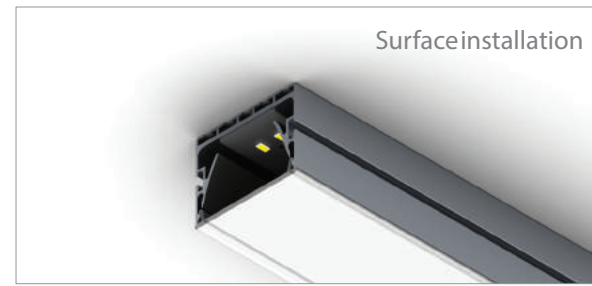

Surface installation



Trimless installation


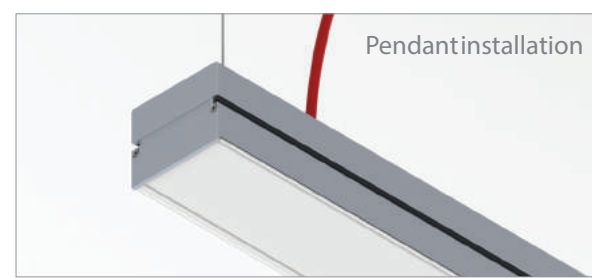


Pendant installation



Linear Connector

Polar Candela Distribution Plot Using Missed Rays

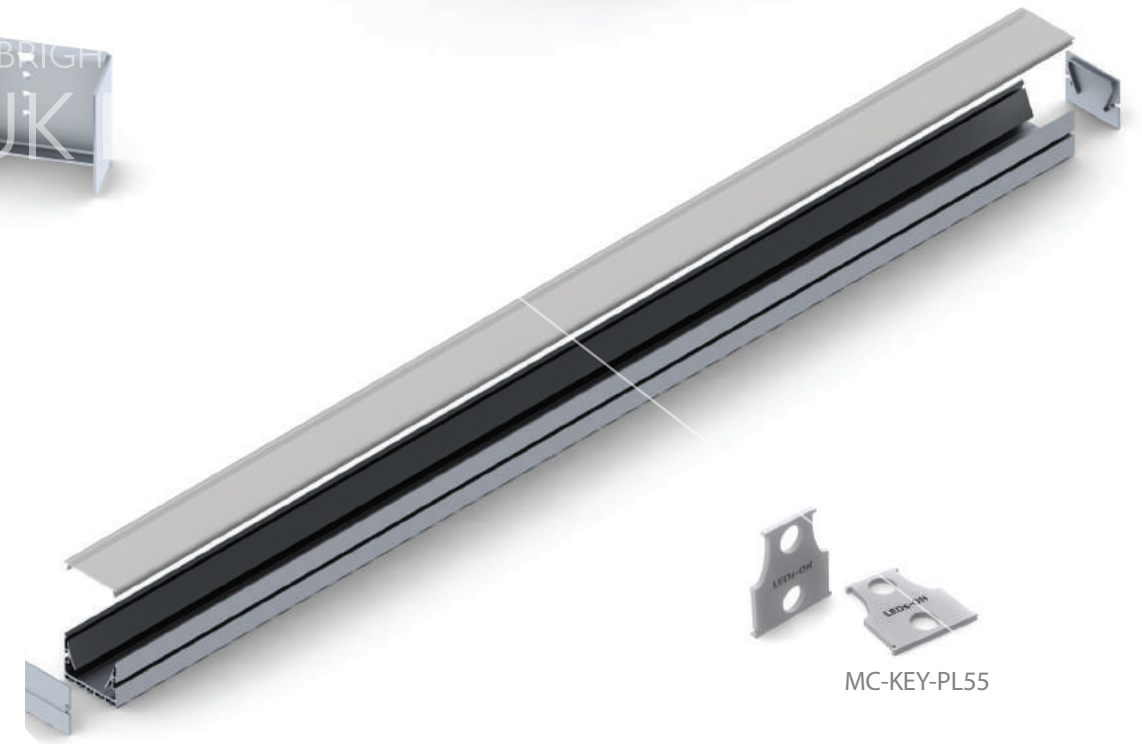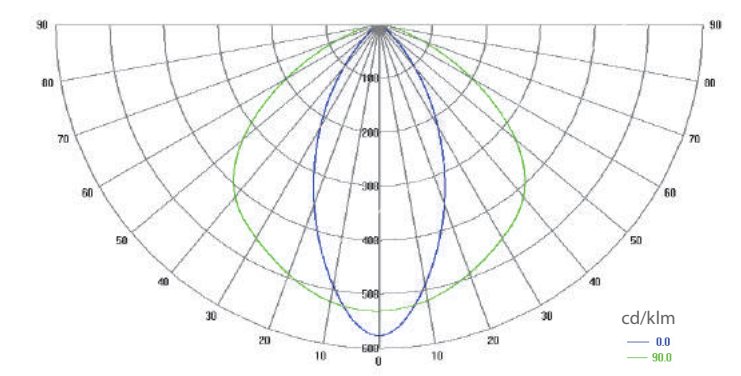

MC-KEY-PL55