



A BRIGHTER FUTURE

UK **LED** lighting

Powerline 55 Linear Pendant 35 Watt

Suspended , Recessed & Surface Mount




IP54

Dimmable


50,000 hours



Part No.	E-30-2EC1X2-24-90-11-PL55R-PR
LED Pitch	15mm
CCT	2400k / 2700k / 2800k / 3000k / 4000k / 5700k
Lumen per Metre Prismatic Diffuser	2107 / 2547 / 2735 / 2987 / 3243 / 3521
CCT	2400k / 2700k / 2800k / 3000k / 4000k / 5700k
Lumen per metre Frosted Diffuser	1812 / 2190 / 2352 / 2568 / 2788 / 3028
Beam Angle	120°
Power Consumption (per metre)	35 Watt
Volt/DC	24
Chip Used	5630 Seoul Semi
PCB Length (mm)	90/45
end cap combined length (mm)	3+3=6
Extrusion / Diffuser length	3 metre max
Tc point °C	60

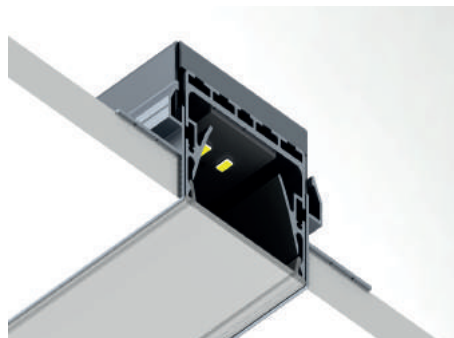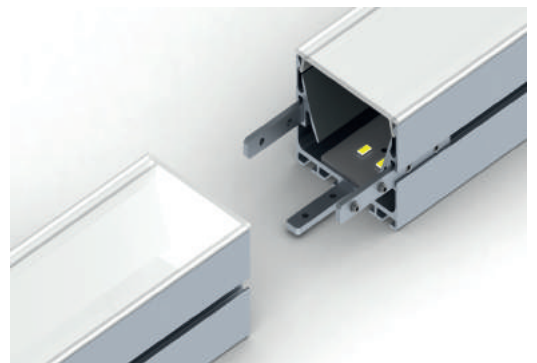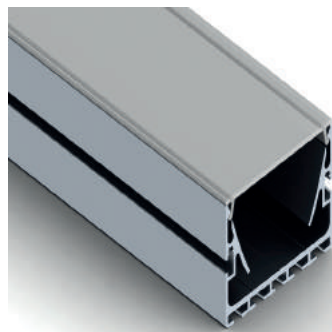

Dimensions

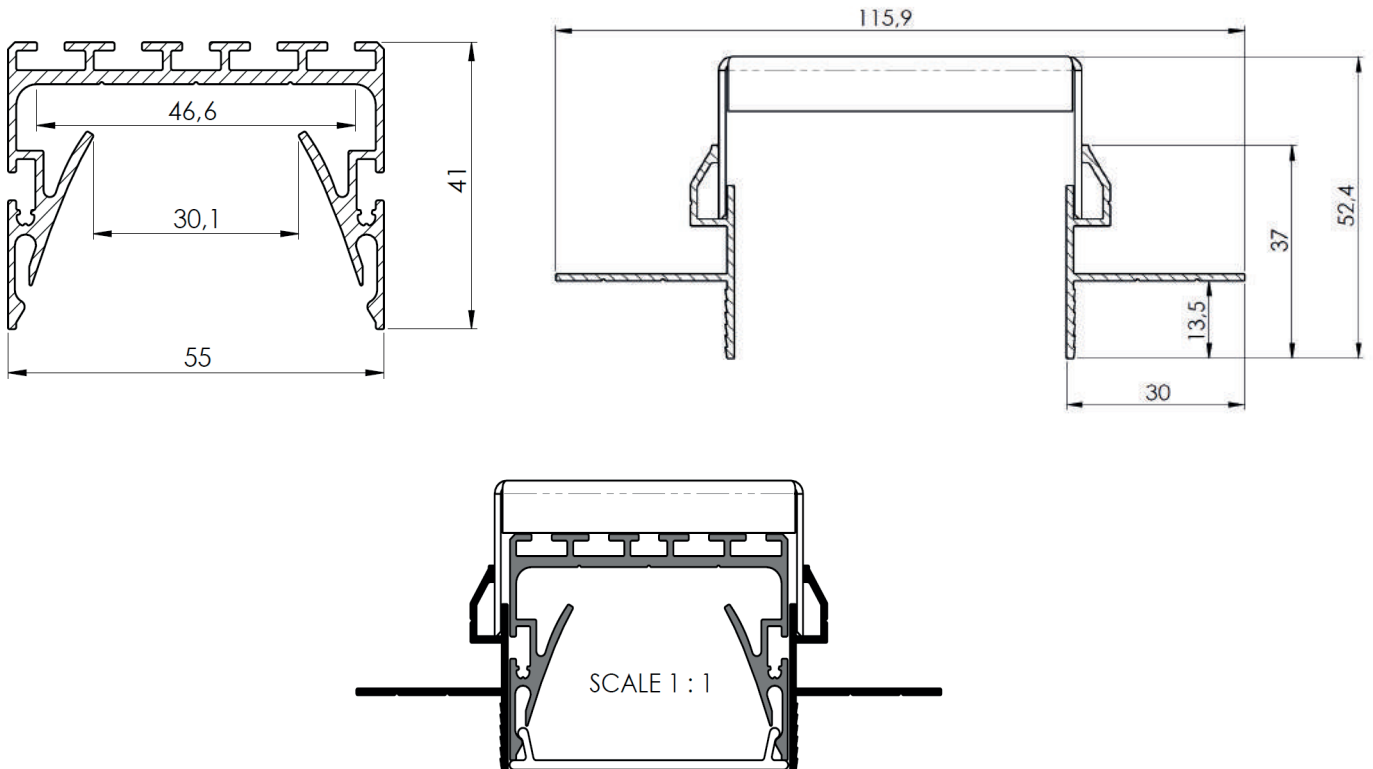

Part numbering key

