A BRIGHTER FUTURE

UK **LED** *lighting*

Skylite LED Panel 1200X600

Emergency | PMMA LGP | TP (a) Fire Rated | LDT /IES files | L 70 | CE

Part No.	UKSLP-40-1200x600-30W-CV-FLF
Dimensions (mm)	1195 * 595* 10 - (1201*601*53 Surface Mount Kit)
LED Type	SMD 2835
Lumen	5500
CCT	4000K (3000k , 5000k , 6000k also available)
Beam Angle	120°
Power Consumption	50 Watts
Volt/AC	100-240
Efficiency	110 Lumen per watt
Diffuser	Crystal View UGR<19 (Small Hex)
Dimmable / Driver options	DALI , 1-10v, Flicker free (class II)
Life Expectancy	50,000 Hours L70
Material	Aluminium, , PMMA LGP
Accessories	Suspension / Surface Mount Kits

Dimensions

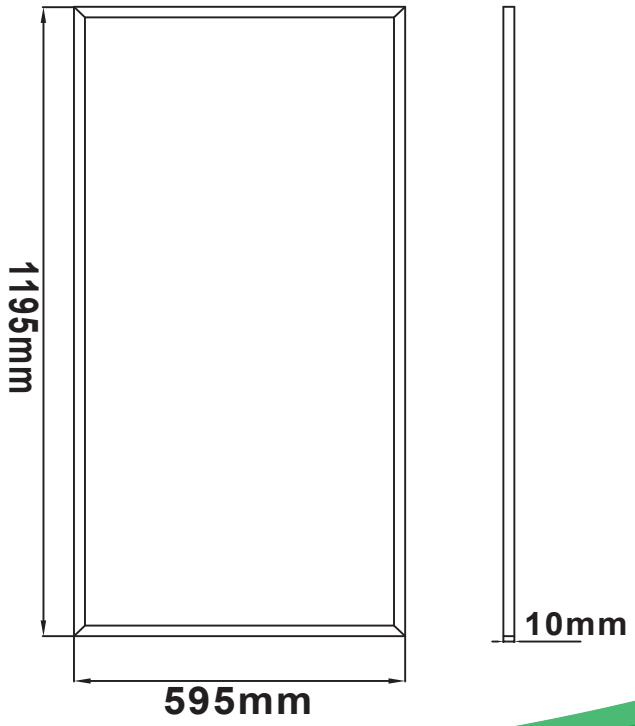

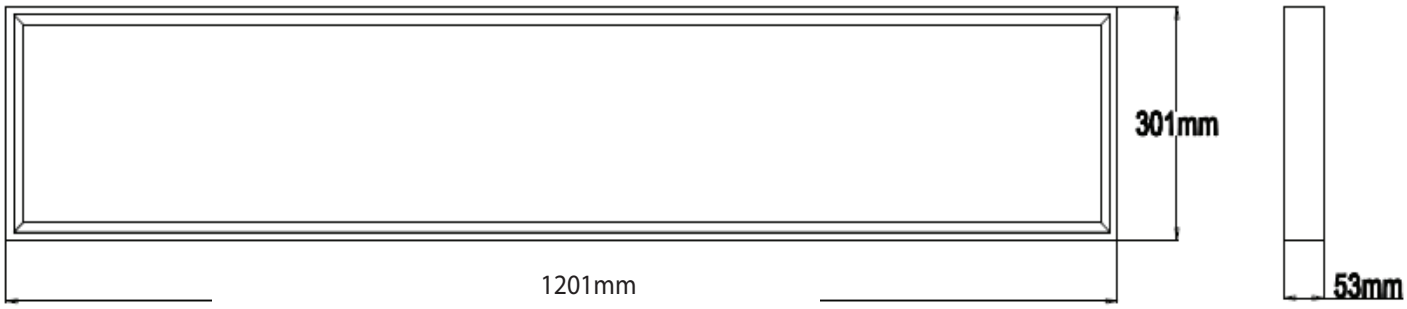

Part numbering key

UK LED Lighting Skylite LED Panel

Size

Watts

DA : DALI dimming
OT: 1-10V dimming
SW : Switched
FLF : Switched Flicker free

UKSKL-SM-40-1200X600-30W-CV-FLF-EM

Emergency ready

CR : Ceiling Recessed
SU : Suspension Kit
SM : Surface mount kit

CCT: 3000K,4000K,5000K,6000K

CV : crystal view UGR<19