

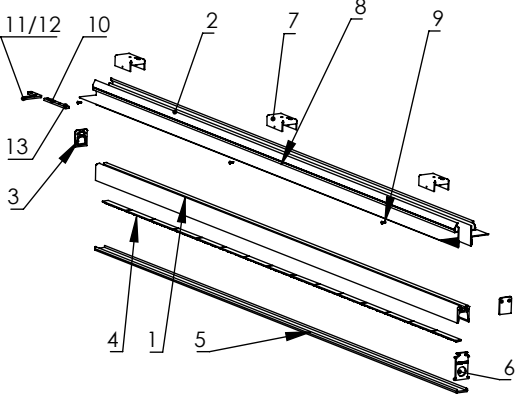
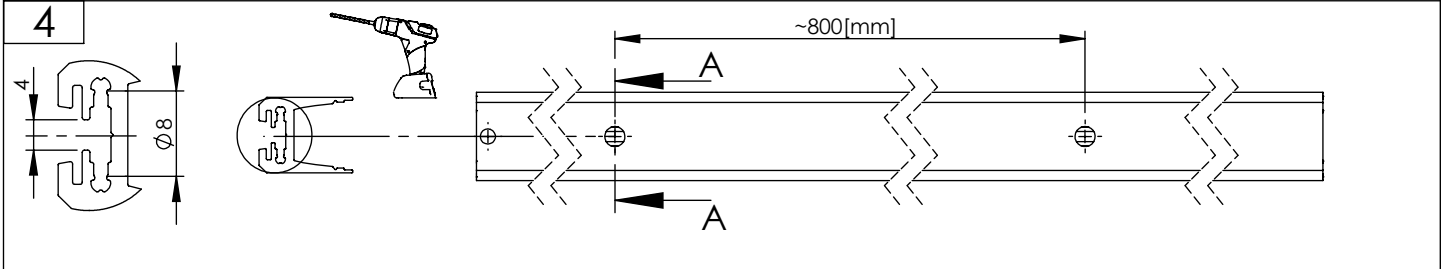
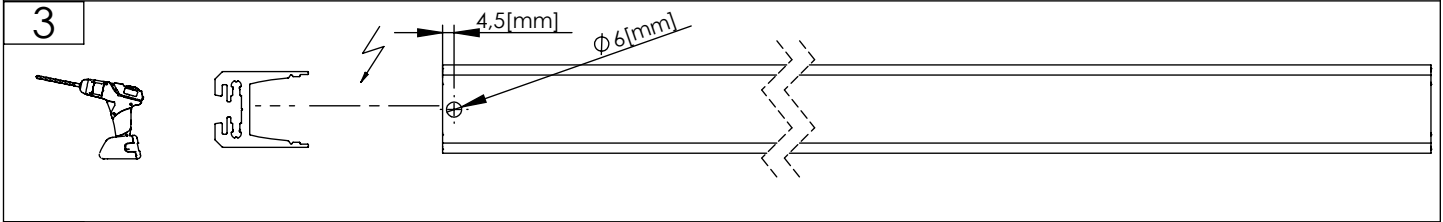
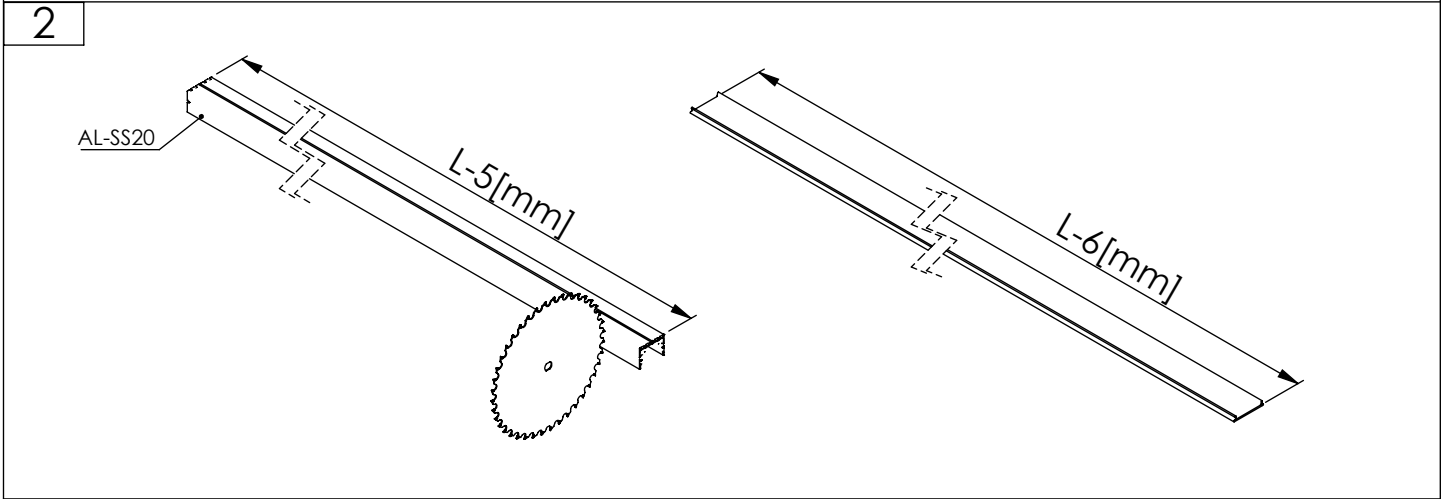


Instruction for mounting


Groove 20 TRIMLESS [ver. screws] 	Nr	Code	Comments	Quantity	
	1	AL-SS20	3[m]	1	
	2	AL-BA-TLESS	2[m] or 3[m]	2	
	3	EC-SS20	end caps	2	
	4	10x195 PCB with 5060 LEDs	LED		
	5	AB-SS20/PRI / M	1, 2 or 3[m]	1	
	6	MC-KEY-SS20		1 per meter	
	7	MC-SS20		2 per 1[m], 3 per 2[m], 4 per 3[m]	
	8	DIN 7982 ST3,5x25		1 per MC_SS20	
	9	DIN 7982 ST2.9x6.5		2 per MC_SS20	
	10	LC-LOCK	profile >3[m]	1 per join	
	11	90LC-HOR	90° horizontal connector	1 per join	
	12	90LC-VER	90° vertical connector	1 per join	
	13	DIN 913 M3x4	profile >3[m] or 90°	4 per join	

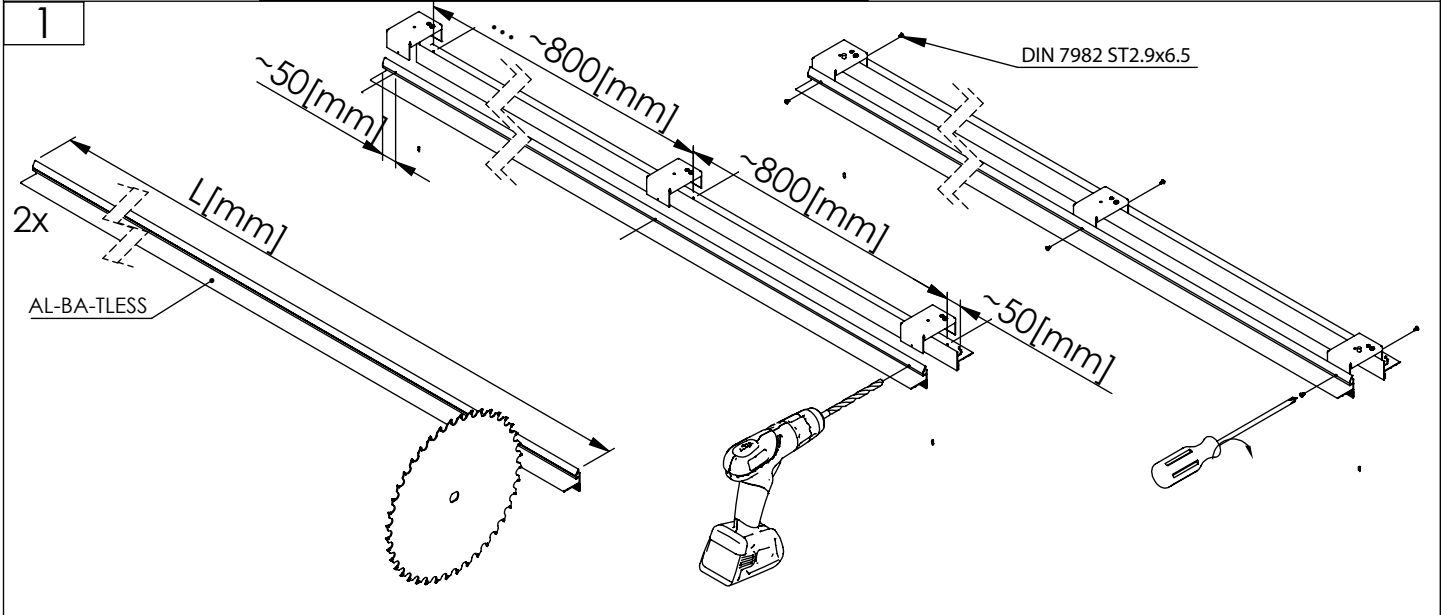


Instruction for mounting

5


Use thermally conductive tape

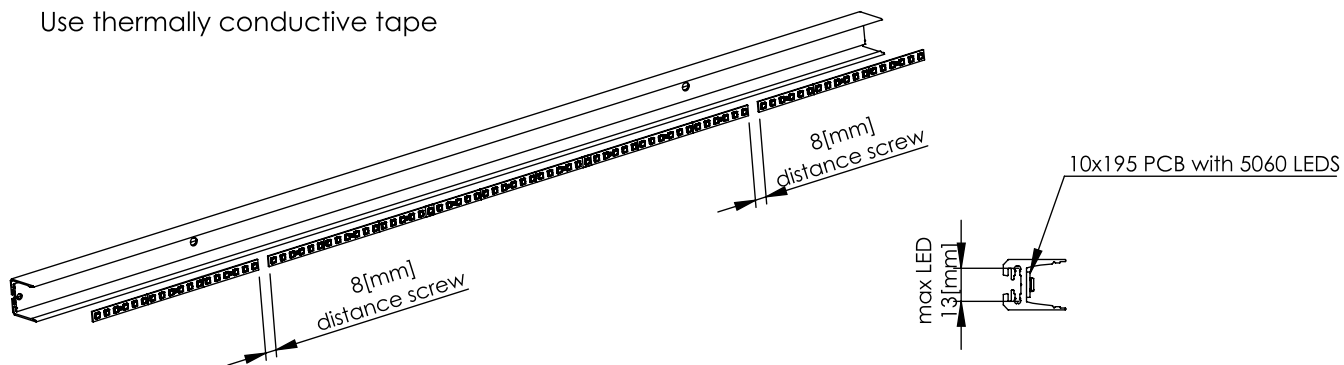


6

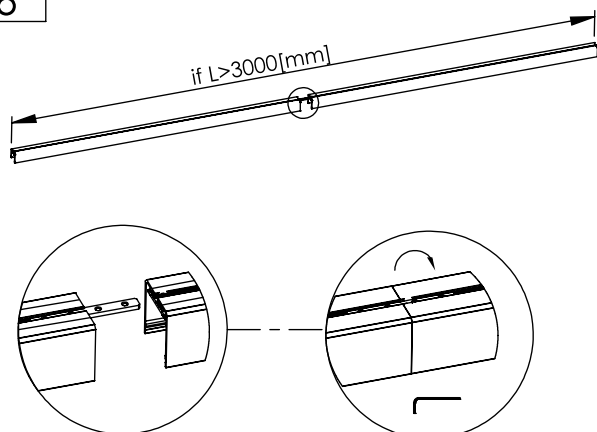

7

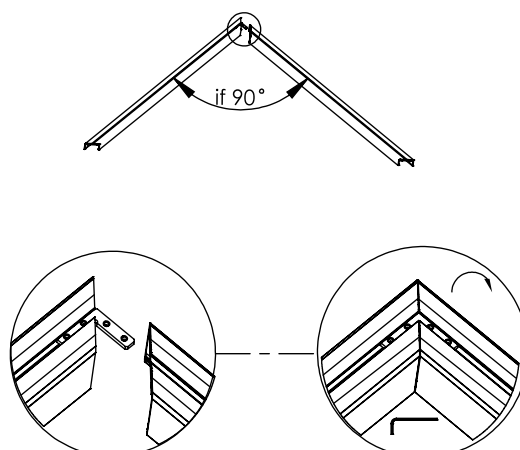


8

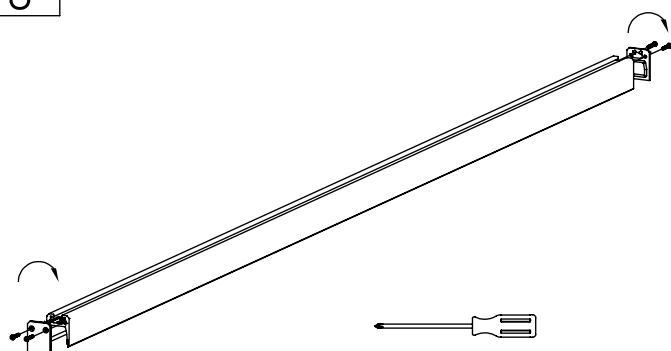


9

Cut out

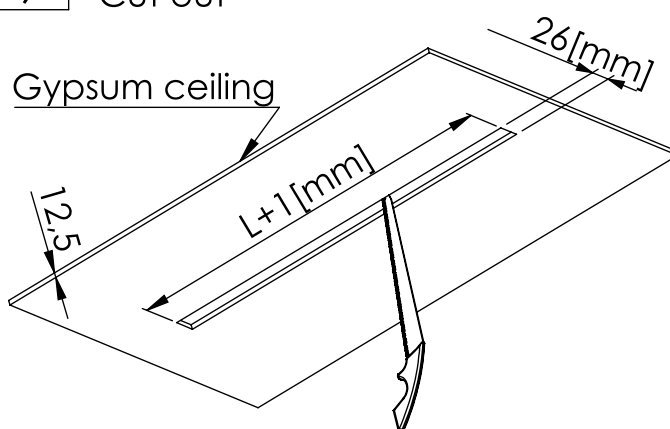

10

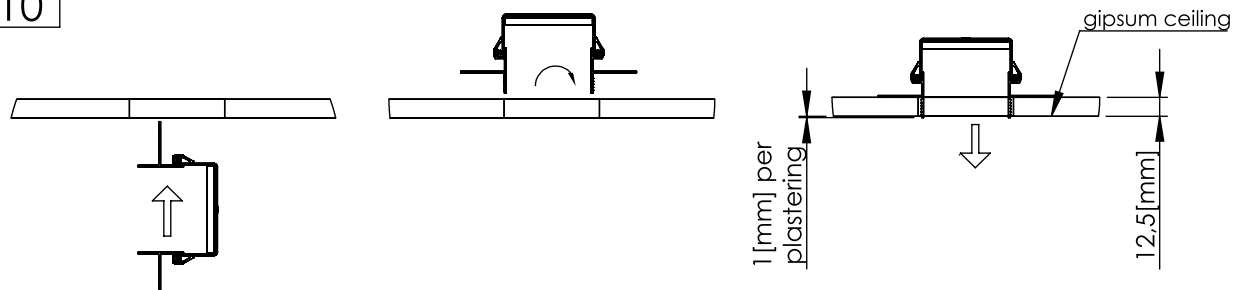

11

