



A BRIGHTER FUTURE

UK **LED** *lighting*

Artaris 600 LED Ceiling Light

V0 Fire rated

LDT files

IP40

High CRI option

Dimmable



Part No.	ARTAR600-30-40W-80-FL-W-O-DI-SM-DA
----------	------------------------------------

LED	CREE
-----	------

CCT	2700K / 3000k / 4000K / 5700K
-----	-------------------------------

Lumens 40W	4400
------------	------

Lumens 60W	6600
------------	------

Beam Angle	12.0 °
------------	--------

Power Consumption	40W to 60W Adjustable Driver
-------------------	------------------------------

Volt/DC	220
---------	-----

Driver	Osram Flicker free Driver
--------	---------------------------




Dimming	Dali or Triac Dimming
---------	-----------------------

Dimensions	600 x 86
------------	----------

PC diffuser	94-V0 fire rated
-------------	------------------

Lumen /Watt	110 (3000K)
-------------	-------------

Life expectancy	50,000 Hours L70
-----------------	------------------

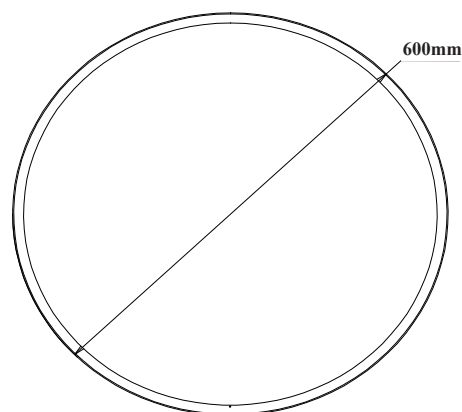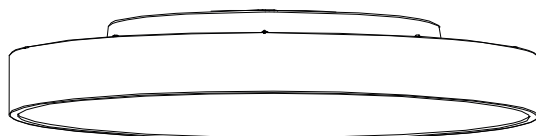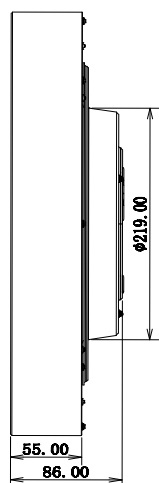


Artaris Flat




Artaris Curved



Artaris Opal or Micro Prismatic Diffuser

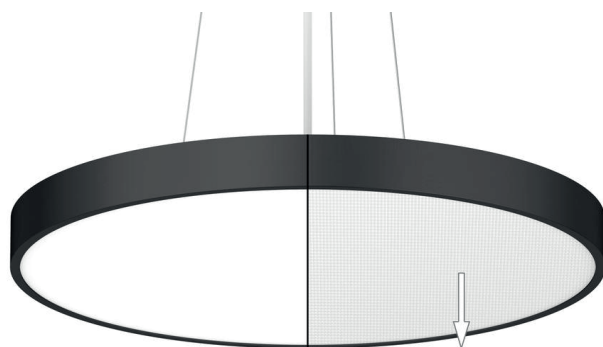


Opal cover



Microprismatic
diffuser




Artaris Flat & Curved Wall Installation

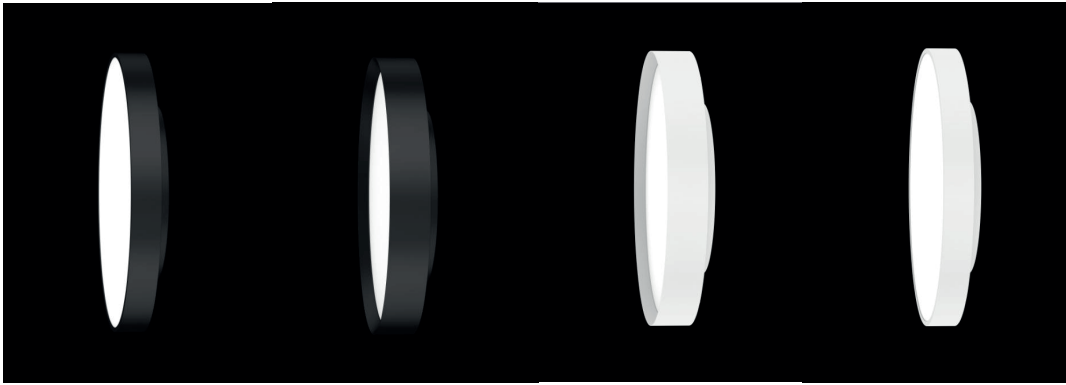


Artaris Flat Direct and Indirect Lighting

Artaris Curved Direct and Indirect Lighting

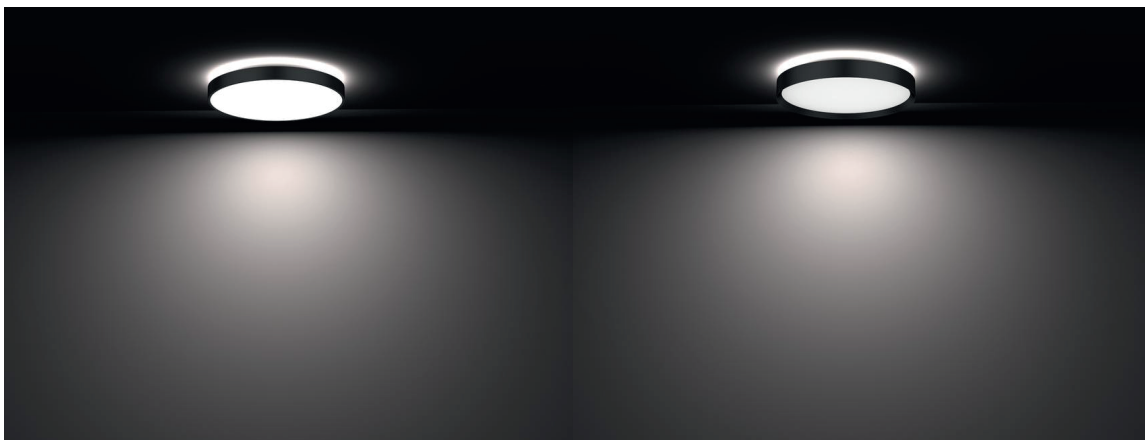

Artaris Flat Direct and Indirect Wall Lighting

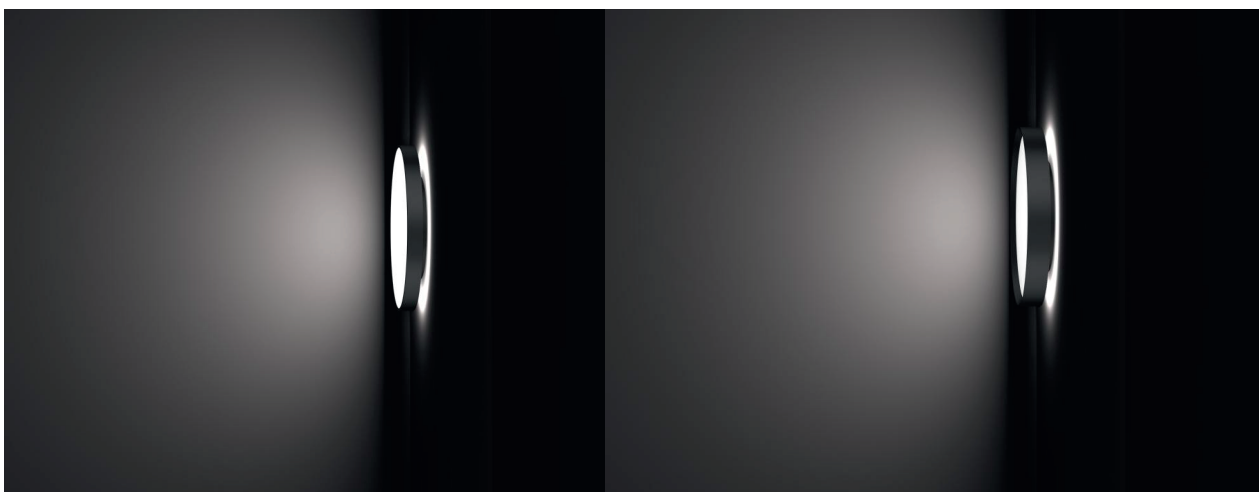

Artaris Flat & Curved Pendant Suspension Cables



Artaris Flat & Curved Pendant Pole Mounted



Part numbering key

CCT : 2700K -5700K

40W to 60W

FL : Flat
CR : Curved

O : Opal Diffuser
M : Micro Prismatic Diffuser

DA : Dali Dimming
TR : Triac Dimming
SW : Switched Driver

Artaris Ceiling Light

ARTAR600-30-40W-80-FL-W-O-DI-SM-DA

80 :CRI 80
90 :CRI 90

W: White
B : Black

D: Direct Light only
DI : Direct & Indirect

SM : Surface Mounted
SU : Suspended (Suspension Cables)
PM : Suspended Pole Mounted