

A BRIGHTER FUTURE

UK LED lighting



Micro X LED Bar 25mm IP67


50,000 Hours

LDT /IES files

IP67

High CRI option

Dimmable

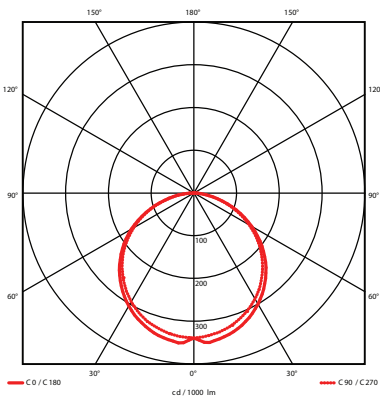


Part No.	E-28-2EC3-24-150-6-SSC5
LED Pitch	25mm
CCT	2400k / 2600k / 2800k / 3000k / 4000k / 5700k
Lumen CRI 85	685 / 828 / 890 / 972 / 1148 / 1148
CCT	2600k / 2800k / 3000k
Lumen CRI 92	569 / 614 / 732
Beam Angle	120°
Power Consumption (per metre)	10.8 Watts
Volt/DC	24
Chip Used	5630 Seoul Semiconductor
PCB Length (mm)	150 / 75
Straight end cap combined length (mm)	2+2=4
Maximum serial connection (mm)	3500
Tc point °C	40
Lumen/Watt	63-106
Warranty	5 years




Dimensions


Straight end cap

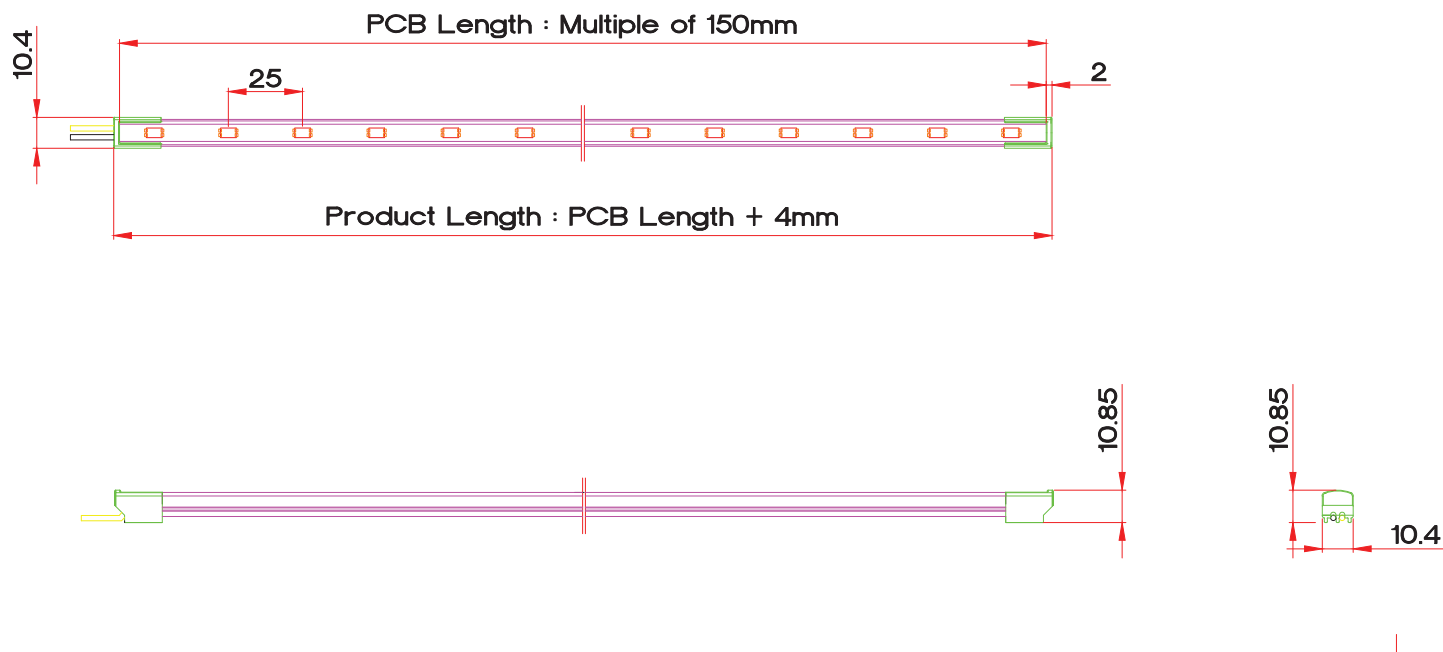


nylon fixing clip

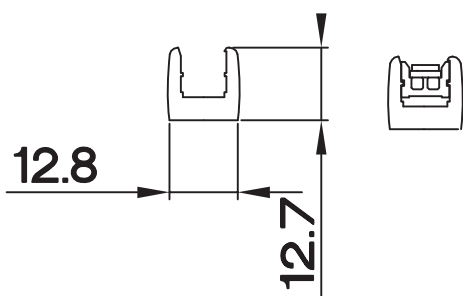



stainless steel fixing clip

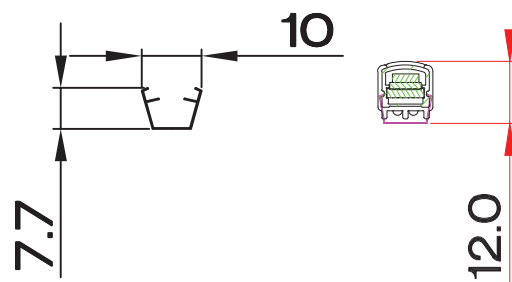

adjustable stainless fixing clip

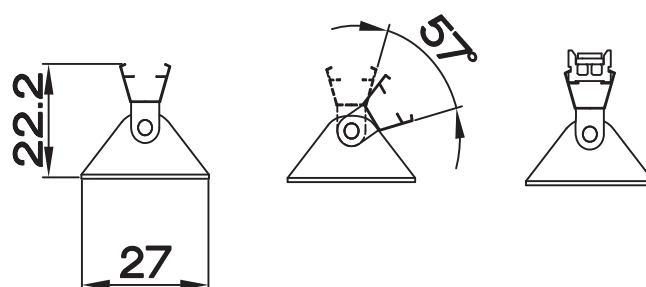

Binning 2 or 3 step MacAdam Ellipse

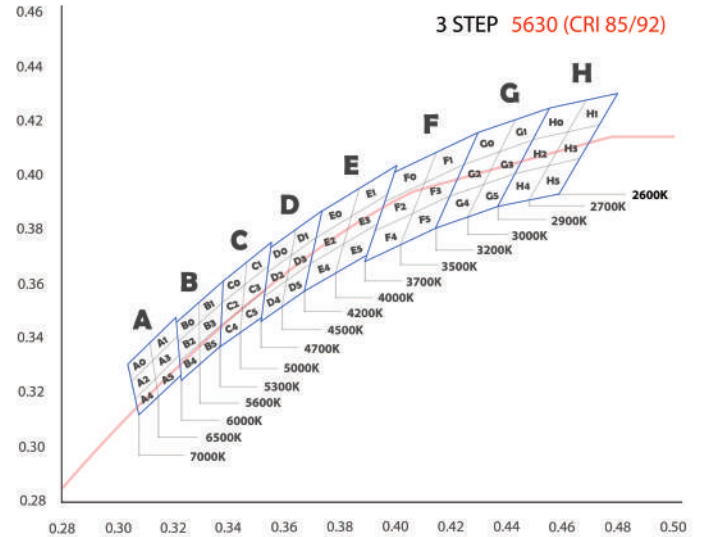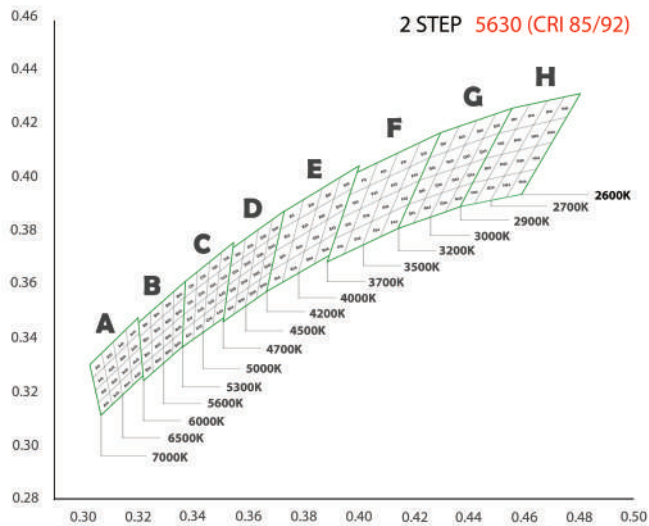

3 Step MacAdam Ellipse by default

Part numbering key

