

A BRIGHTER FUTURE

UK **LED** lighting



Micro X LED Bar 40mm IP67

50,000 Hours

LDT / IES Files

IP67

High CRI option

Dimmable

CE

Part No.

E-28-2EC4-24-240-4-SSG5

LED Pitch

40mm

CCT

2400k / 2600k / 2800k / 3000k / 4000k / 5700k

Lumen CRI 85

478 / 578 / 621 / 678 / 799 / 799

CCT

2600k / 2800k / 3000k

Lumen CRI 92

395 / 428 / 511

Beam Angle

120°

Power Consumption (per metre)

7.5 Watts

Volt/DC

24

Chip Used

5630 Seoul Semiconductor

PCB Length (mm)

240 / 120

Straight end cap combined length (mm)

2 + 2 = 4

Maximum serial connection (mm)

4800

Tc point °C


35

Lumen/Watt

63-106


Warranty

5 years

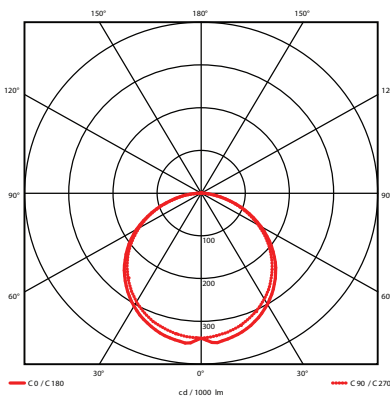


Dimensions


Straight end cap

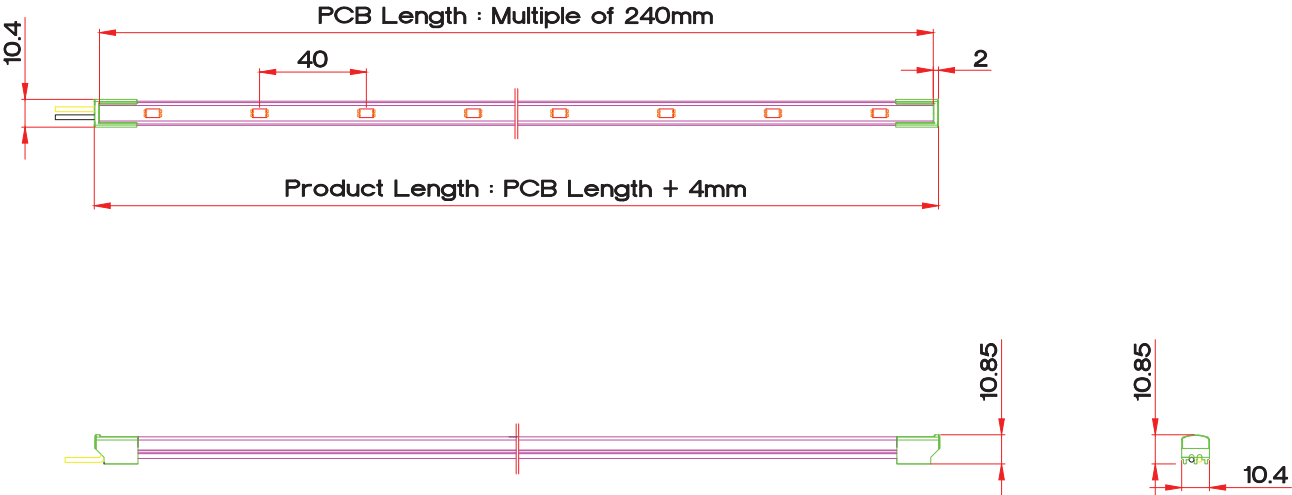


nylon fixing clip

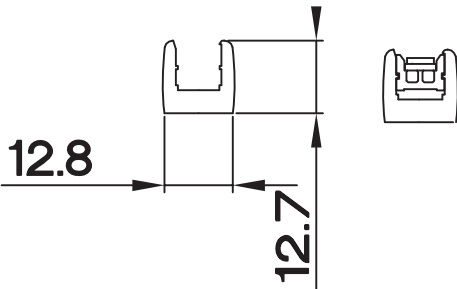



stainless steel fixing clip

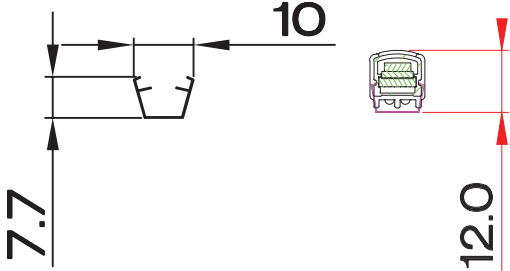

adjustable stainless fixing clip

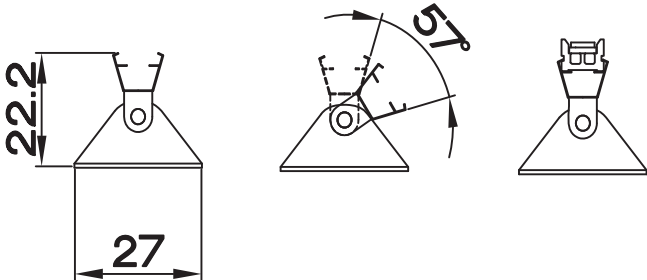

Binning 2 or 3 step MacAdam Ellipse

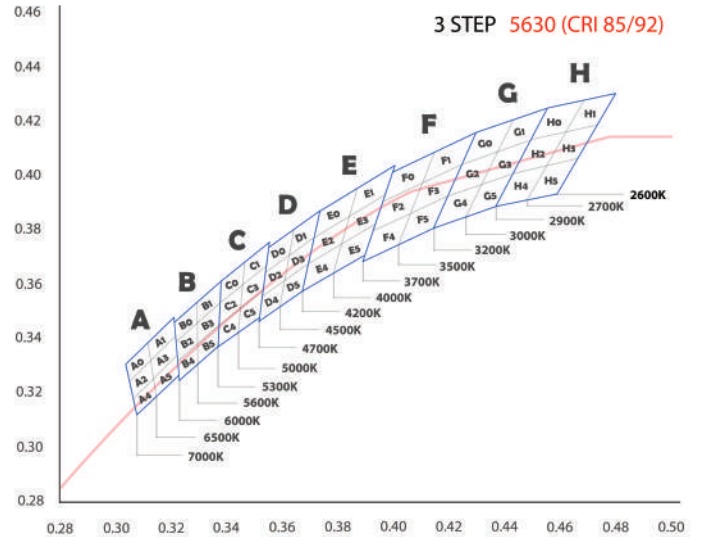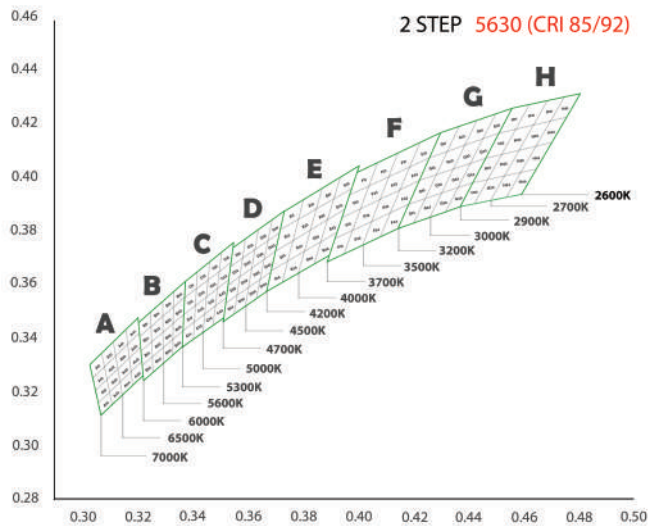

3 Step MacAdam Ellipse by default

Part numbering key

